




赤无度·克尤界

深圳市赤度科技有限公司
地址：深圳市光明区公明街道公明社区长春中路98号
电话：0755-33922600
网址：CIDOO.COM

版权及声明：CIDOO 赤度和其它赤度商标均归赤度公司所有，并己申请注册。所有其它商标均是其各自所有者的财产，赤度对于本产品中可能出现任何错误不承担任何责任。

Shenzhen Cidoo Technology Co., Ltd
Add: 104, Building 26, Changshun Garden, Gongming Street, Guangming District, Shenzhen City, Guangdong Province, China
TEL: 86-755-33922600
Website: CIDOO.COM

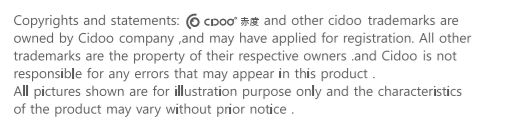

Copyrights and statements: CIDOO and other cidoo trademarks are owned by Cidoo company and may have applied for registration. All products shown are for illustration purpose only and the characteristics of the product may vary without prior notice.

产品有害物质名称及含量

为满足《电器电子产品有害物质限制使用管理办法》(中华人民共和国工业和信息化部32号令)的相关规定和要求,本产品中有害物质,按部件分类,声明如下:

Table with columns: 部件名称, 有害物质 / Hazardous Substance, 铅(Pb), 汞(Hg), 镉(Cd), 六价铬(Cr(VI)), 多溴联苯(PBB), 多溴二苯醚(PBDE)

本产品所含有的有害物质是由于现阶段技术水平限制找不到可供替代的物质导致的,符合中国《电器电子产品有害物质限制使用管理办法》的要求,且属于欧盟RoHS豁免范围内。

10 保修卡

在购买产品时,请完整清楚地填写下列信息,并加盖销售章,以保障您的合法权益。

Table with columns: 用户信息, 产品信息, 销售商信息, 电子邮件, 邮政编码, 销售日期, 发票号码, 联系电话, 邮政编码

注: (1) 此表应由销售商盖章确认; (2) 对于可选用相关三包规定的产品,本保修卡等同与三包凭证; (3) 维修记录以授权服务机构维修凭证为准,申请售后时,请妥善保管。

欢迎您选购赤度ABM098机械键盘,希望您使用愉快,功能操作说明请参考以下内容。

默认快捷键

- 灯光设置按键 FN+J: 背光灯效亮度增加 FN+=: 背光灯色增加 FN+-: 背光灯效速度减小 FN+[-: 背光灯饱和度增加 FN+]: 背光灯饱和度减小 FN+Backspace: 关闭/开启背光灯 FN+Pg Up: 切换右上角铭牌灯光模式,共五种循环模式,依次灯效为流光跑马、循环呼吸、霓虹、橙色秀发、灭 FN+Pg Dn: 切换左上角铭牌灯光颜色,共九种颜色可循环切换,红橙黄绿青蓝紫白彩色 FN+Space: 长按N+Space三秒,键盘恢复出厂设置

旋钮开关功能

音量大小调节,逆时针旋转为音量减,顺时针旋转为音量加,下压旋钮时为静音

多媒体按键

- FN+A: Windows 系统 FN+S: Mac 系统 FN+F1: 播放器 FN+F2: 音量+ FN+F3: 音量- FN+F5: 停止 FN+F6: 上一曲 FN+F7: 播放/暂停 FN+F9: 静音 FN+F10: 主页 FN+F11: 计算器 FN+Esc: 关机 FN+DEL: PRtSC FN+INS: PAUSE FN+END: HOME FN+WIN: 锁win键,再按一次解除

三模(有线/蓝牙5.0/2.4G无线)对码连接方法

有线模式 请将USB线插入电脑设备,将键盘左侧拨动开关切换到有线模式,键盘背光亮起并变为默认的RGB灯效,则表示连接成功。

蓝牙配对方法:

- 1.赤度ABM098蓝牙键盘最多可同时连接3个蓝牙设备。将键盘左侧电源开关打开,按住 FN + Q 或者按住 FN + W 或者按住 FN + E 键 3-5秒,当设备指示灯(位于旋钮下方指示灯右侧)开始快速闪烁,表示键盘在可连接状态。

2.在要连接的设备上打开蓝牙,搜索并选择其中一个FN + Q对应设备名CIDOO ABM098-1, FN + W对应设备名CIDOO ABM098-2, FN + E对应设备名CIDOO ABM098-3; 点击连接配对

3.键盘与设备连接成功后,设备指示灯会停止闪烁,背光亮起,短按FN-Q或者FN+W 或者FN-E键,切换已经配对好的蓝牙设备。蓝牙连接是有记忆的,关闭键盘电源开关蓝牙会断开;重新打开电源开关,ABM098会默认回连到蓝牙断开前使用的设备

2.4Ghz无线连接

- 1. 请先将键盘电源打开,通过长按FN-R键将进行2.4Ghz无线连接
2. 通过USB接口将2.4Ghz接收器插入设备
3. 长按FN-R键进行对码,此时,设备指示灯会快速闪烁青色,连接成功后停止闪烁并保持常亮

自动休眠模式

键盘无按键操作5分钟后背光关闭,按任意按键唤醒键盘 键盘无按键操作30分钟后进入深度休眠模式,蓝牙断开,按任意按键将退出深度休眠模式,RGB背光亮起并回连蓝牙


充电指示灯:

当键盘的电池电量低时(电池电量小于3.5V)FN键会持续闪烁红灯,充电时,FN键会常亮红灯充满后FN键灯恢复到当前背光灯颜色


自定义设置

赤度ABM098支持VIA 程序改版布局 请确保您的键盘已正确插入电脑设备


- VIA 安装步骤如下: 1.请访问https://github.com/WestBerryVIA/via-releases/releases选择您需要的最新的VIA软件然后下载并安装在电脑上.如下图



2.从赤度官网下载CIDOO ABM098 json文件(区分有线和2.4Ghz无线版本)并上传到VIA软件,网址为: WWW.CIDOO.COM 如下图

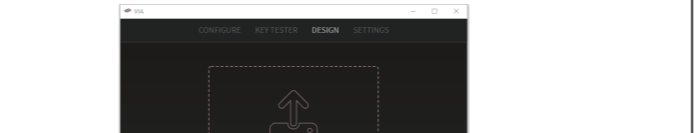

3.如下画面表示VIA软件安装完成并成功连接。

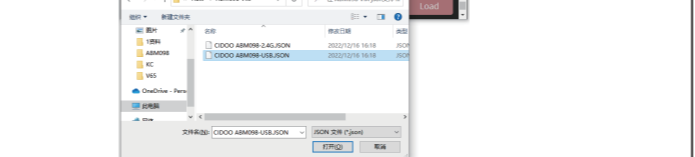

如果VIA软件无法识别您的键盘,请联系我们的客服人员寻求帮助

如果您的键盘已经插入VIA会自动检测您的键盘是否兼容。键盘记忆是持久的,这意味着无论你在哪里插入键盘,它都会记住位置。

在VIA软件页面上半部分,鼠标点击选择你想要更改的按键,然后再用鼠标点击VIA软件页面下半部分中你想要更改的按键,该按键功能生效。

更多设置板块请见以下说明:

宏设置

CIDOO ABM098按键中没有设置多媒体按键,在此可以通过VIA软件映射多媒体按键到你想要的按键上,实现多媒体快捷操作。CIDOO ABM098默认配置了0-3层4个层级,每个单独的按键都可以拥有多个功能。特殊键设置 在此可以通过按键变更功能将特殊按键替换到你想要的按键上,实现该功能的快捷操作。

QMK灯光

CIDOO ABM098 VIA软件中默认提供了多种不同的RGB灯光效果,你可以在上面改变灯光亮度,速度,颜色以及定制你自己想要的灯光效果,也可以更改按键来操作你设定好的灯光效果。

其他定制化

CIDOO ABM098提供其他功能按键的定制化键 CIDOO ABM098默认定制了0-3层键盘布局图

层0: 当你使用键盘连接到Win系统设备时,层0将被激活使用

层1: 当你使用键盘连接到Mac系统设备时,层1将被激活使用,其中按键 Left Alt=Left Option Left Win=Left Command Right Alt= Right Option

模(有线/蓝牙5.0)

clockwise is volume up, press one time to mute

Media Keys

- FN+A: Windows System FN+S: Mac System FN+F1: Media player FN+F2: Volume+ FN+F3: Volume- FN+F4: Mute FN+F5: Stop FN+F6: Previous Track FN+F7: Play/Pause FN+F8: Next Track FN+F9: Email FN+F10: Home FN+F11: Calculator FN+F12: Search FN+Esc: PAUSE FN+DEL: PRtSC FN+INS: PAUSE FN+END: HOME FN+WIN: Lock win key

Toggle (Wired/BT5.0/2.4Ghz) and Pairing Method:

Wired Mode Please toggle the mode switch(keyboard left side) to the wired mode, and then insert USB cable into your computer, the keyboard backlighting lights on and turns to the default of RGB backlight effect, it means connection successful.

Bluetooth® Pairing Instructions:

Perform the following steps to pair this keyboard with your device(s).

- 1.This Bluetooth keyboard can be paired with up to three devices at the same time. Please toggle the mode switch to the wireless mode. Press and hold the FN and Q / or FN and W / or FN and E keys for 3-5 seconds. When device indicator(located at rightmost of the knob lower position) starts flashing, the keyboard is ready to connect.

Knob Function

Volume adjust, turn counterclockwise is volume down, rotate

Locate and select one of BT device name entry, "ABM098-1" for FN+Q ; "ABM098-2" for FN+W, "ABM098-3" for FN+E .

3. Once the keyboard has connected to your device, the device indicator key will cease flashing, indicating that Bluetooth pairing was successful. Short press "FN" and "Q" or "FN" and "W" or "FN" and "E" keys to switch paired Bluetooth device.

The Bluetooth connection has memory . It will disconnect when power off the keyboard ,and the keyboard will re-connect to the last device when power on the keyboard again.

2.4Ghz Wireless Connection

- 1.Please toggle the mode switch to the wireless mode.
2.Plug in the receiver into your device.
3.Long press FN+R key enter 2.4G pairing mode . At this time, the device indicator flashes cyan quickly. Once connected successfully, the device indicator will cease flashing .

Auto sleep mode

After 5 minutes without a keypress, the backlighting will turn off to conserve battery. Any keypress will be awaken the keyboard.

After 30 minutes without a keypress, the keyboard will entry deep sleep under Bluetooth mode, Bluetooth disconnect, any keypress will reconnect the keyboard



Battery Charging:

FN key will blink red repeatedly when the keyboard is low on battery (battery voltage less than 3.5V). It is always red light when charging, it's turns to the default RGB backlighting after charging finished.


CUSTOM CONFIGURATION How do I configure my keyboard ?

Cidoo ABM098 support VIA firmware to remap the keys .VIA is a software that allows you to configure your keyboard. Note :Please make sure your keyboard has been correctly plugged in your computer device.

VIA setup instructions are here : 1.Please visit "https://github.com/WestBerryVIA/via-releases/releases" to download the latest VIA application for your computer's OS here .

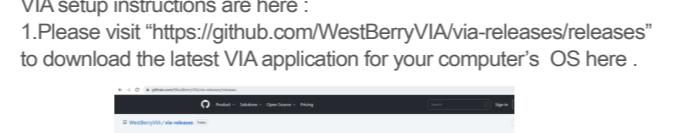

2.Download CIDOO ABM098 json file (Two different json files for the wired and 2.4Ghz wireless) via WWW.CIDOO.COM and load the file.

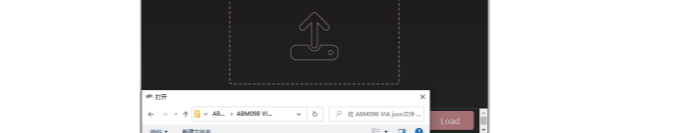

3.Installation is completed and VIA software connected successfully if show below picture .

If the VIA software cannot recognize your keyboard, please reach out our support to get the instruction.

VIA automatically detects your compatible keyboard if it's plugged in. Keyboard memory is persistent, which means that wherever you plug in keyboard, it remembers the settings.

On the top half of VIA software, choose one key by your mouse, and then select the key that you wanted on the bottom half of VIA software, and it was effected.

Firstly switch to VIA software key tester table, there is not any background color before you press any keys, when you want to test this key you have programmed, press it and the background color will change to red color means it works, otherwise it is not work.

See below for more information about configuration

Macros setting

CIDOO ABM098 does not have physical multimedia keys, you can remap the keys through the VIA software to achieve the function. CIDOO ABM098 is configured with 4 layers from 0 to 3 by default, and each individual key can have multiple functions.

Special keys setting

Here you can remap the key to replace the special key to the key you want, to achieve the quick operation of the function.

CIDOO ABM098 VIA software provides many different RGB lighting effects by default. You can change the lighting brightness, speed, color and customize the lighting effect you want. You can also change the key to operate the lighting effect you set.

Others custom

CIDOO ABM098 provides other customized remap to other functional keys.

About Layers


Layers allow you to configure your keyboard with more behaviors than its number of physical keys . CIDOO ABM098 default customized 0-3 layer keyboard layout.

Layer0: This layer will be activated when your keyboard connected to the Windows system.


Layer1: This layer will be activated when your keyboard connected to the Mac system.

Layer2: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and press Fn1(3) key.

Layer3: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and keymapped any keys to MO(3) and then press it.

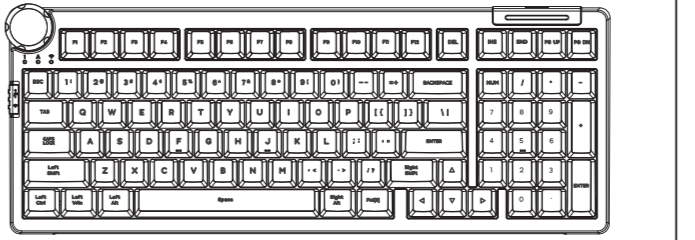

层1: 当你使用键盘连接到Win/Mac系统设备时, 长按Fn1(3)按键层1将被激活使用

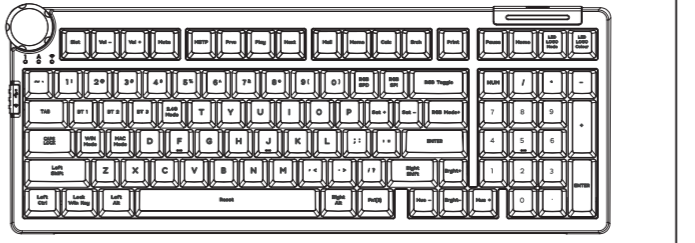


层2: 当你使用键盘连接到Win/Mac系统设备时, 通过VIA改键设置任意按键为MO(2)保存后, 长按MO(2)按键层2将被激活使用



层3: 当你使用键盘连接到Win/Mac系统设备时, 通过VIA改键设置任意按键为MO(3)保存后, 长按MO(3)按键层3将被激活使用

层3: 当你使用键盘连接到Win/Mac系统设备时, 通过VIA改键设置任意按键为MO(3)保存后, 长按MO(3)按键层3将被激活使用

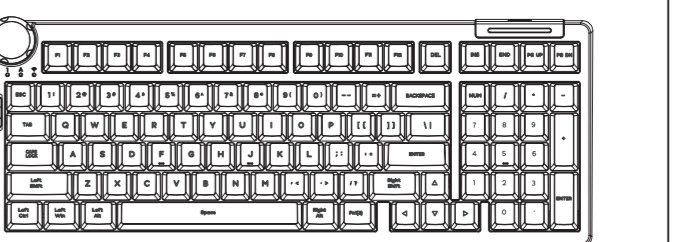


按键说明

Table with columns: Key, Function, Key, Function

QC PASS

ABM098 Division

VIA TRI-MODE HOT-SWAP MECHANICAL KEYBOARD

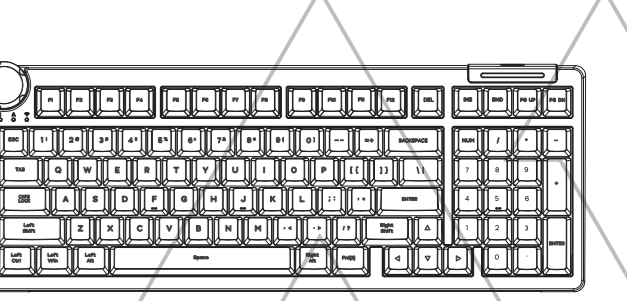

Cidoo VIA Tri-mode Hot-swap Mechanical Keyboard A Customizable Keyboard that Supports VIA Software

clockwise is volume up, press one time to mute

Media Keys

- FN+A: Windows System FN+S: Mac System FN+F1: Media player FN+F2: Volume+ FN+F3: Volume- FN+F4: Mute FN+F5: Stop FN+F6: Previous Track FN+F7: Play/Pause FN+F8: Next Track FN+F9: Email FN+F10: Home FN+F11: Calculator FN+F12: Search FN+Esc: PAUSE FN+DEL: PRtSC FN+INS: PAUSE FN+END: HOME FN+WIN: Lock win key

Toggle (Wired/BT5.0/2.4Ghz) and Pairing Method:

Wired Mode Please toggle the mode switch(keyboard left side) to the wired mode, and then insert USB cable into your computer, the keyboard backlighting lights on and turns to the default of RGB backlight effect, it means connection successful.

Bluetooth® Pairing Instructions:

Perform the following steps to pair this keyboard with your device(s).

- 1.This Bluetooth keyboard can be paired with up to three devices at the same time. Please toggle the mode switch to the wireless mode. Press and hold the FN and Q / or FN and W / or FN and E keys for 3-5 seconds. When device indicator(located at rightmost of the knob lower position) starts flashing, the keyboard is ready to connect.

Knob Function

Volume adjust, turn counterclockwise is volume down, rotate

Locate and select one of BT device name entry, "ABM098-1" for FN+Q ; "ABM098-2" for FN+W, "ABM098-3" for FN+E .

3. Once the keyboard has connected to your device, the device indicator key will cease flashing, indicating that Bluetooth pairing was successful. Short press "FN" and "Q" or "FN" and "W" or "FN" and "E" keys to switch paired Bluetooth device.

The Bluetooth connection has memory . It will disconnect when power off the keyboard ,and the keyboard will re-connect to the last device when power on the keyboard again.

2.4Ghz Wireless Connection

- 1.Please toggle the mode switch to the wireless mode.
2.Plug in the receiver into your device.
3.Long press FN+R key enter 2.4G pairing mode . At this time, the device indicator flashes cyan quickly. Once connected successfully, the device indicator will cease flashing .

Auto sleep mode

After 5 minutes without a keypress, the backlighting will turn off to conserve battery. Any keypress will be awaken the keyboard.

After 30 minutes without a keypress, the keyboard will entry deep sleep under Bluetooth mode, Bluetooth disconnect, any keypress will reconnect the keyboard



Battery Charging:

FN key will blink red repeatedly when the keyboard is low on battery (battery voltage less than 3.5V). It is always red light when charging, it's turns to the default RGB backlighting after charging finished.


CUSTOM CONFIGURATION How do I configure my keyboard ?

Cidoo ABM098 support VIA firmware to remap the keys .VIA is a software that allows you to configure your keyboard. Note :Please make sure your keyboard has been correctly plugged in your computer device.

VIA setup instructions are here : 1.Please visit "https://github.com/WestBerryVIA/via-releases/releases" to download the latest VIA application for your computer's OS here .

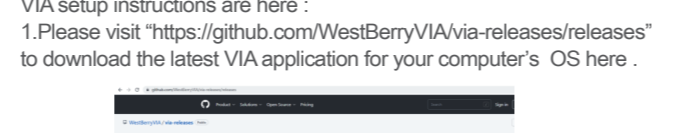

2.Download CIDOO ABM098 json file (Two different json files for the wired and 2.4Ghz wireless) via WWW.CIDOO.COM and load the file.

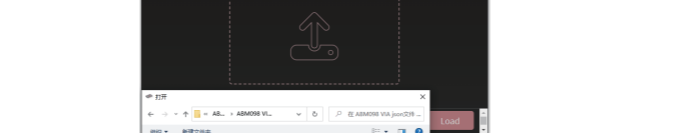

3.Installation is completed and VIA software connected successfully if show below picture .

If the VIA software cannot recognize your keyboard, please reach out our support to get the instruction.

VIA automatically detects your compatible keyboard if it's plugged in. Keyboard memory is persistent, which means that wherever you plug in keyboard, it remembers the settings.

On the top half of VIA software, choose one key by your mouse, and then select the key that you wanted on the bottom half of VIA software, and it was effected.

Firstly switch to VIA software key tester table, there is not any background color before you press any keys, when you want to test this key you have programmed, press it and the background color will change to red color means it works, otherwise it is not work.

See below for more information about configuration

Macros setting

CIDOO ABM098 does not have physical multimedia keys, you can remap the keys through the VIA software to achieve the function. CIDOO ABM098 is configured with 4 layers from 0 to 3 by default, and each individual key can have multiple functions.

Special keys setting

Here you can remap the key to replace the special key to the key you want, to achieve the quick operation of the function.

CIDOO ABM098 VIA software provides many different RGB lighting effects by default. You can change the lighting brightness, speed, color and customize the lighting effect you want. You can also change the key to operate the lighting effect you set.

Others custom

CIDOO ABM098 provides other customized remap to other functional keys.

About Layers


Layers allow you to configure your keyboard with more behaviors than its number of physical keys . CIDOO ABM098 default customized 0-3 layer keyboard layout.

Layer0: This layer will be activated when your keyboard connected to the Windows system.


Layer1: This layer will be activated when your keyboard connected to the Mac system.

Layer2: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and press Fn1(3) key.


Layer3: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and keymapped any keys to MO(3) and then press it.

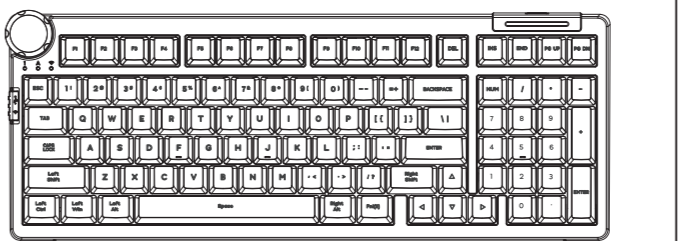

Layer1: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and press Fn1(3) key.

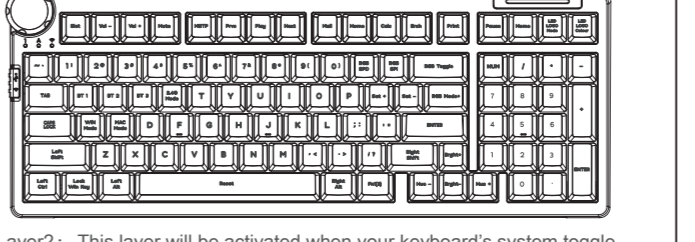

Layer2: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and press Fn1(3) key.

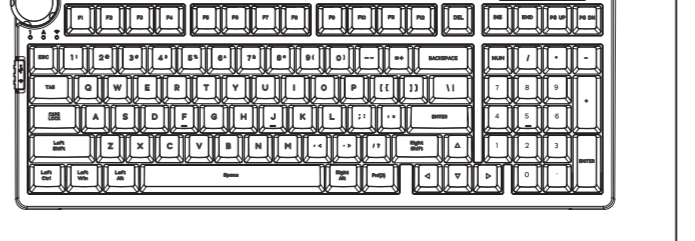

层3: 当你使用键盘连接到Win/Mac系统设备时, 通过VIA改键设置任意按键为MO(3)保存后, 长按MO(3)按键层3将被激活使用

Layer3: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and keymapped any keys to MO(3) and then press it.



Key description

Table with columns: Key, Function, Key, Function

保修声明

感谢您对我们产品的信任与支持, 为了您放心使用本产品, 更好地保障您的权益, 我们将严格遵守并执行相关规定, 实行售后相关服务:

- 服务内容: 按微型计算机产品维修更换退换货责任规定进行服务
以下不属于服务之范围:
(A) 误用、滥用或不适当的运输;
(B) 维护或保养、仿造或不遵守在不适当的温度、湿度或其他不当环境下使用;
不可抗力或意外事件、网络或电力中断等非我们可合理控制的事由;
(C) 非授权人员擅自修理或拆改;
(D) 任何第三方产品或服务;
(E) 将产品用于非指定或预期目的;
(F) 以其他违反产品使用说明书的方式使用。产品使用过程中发生的正常损耗或老化、划痕、擦伤以及因使用涂料、溶剂或其他化学物质导致的损害不属于保修范围。如产品原有所标识标签被更改或损毁, 本保证将失效。产品及随附物料的良好和齐备不属保证范围, 您应在接收产品时当场检验并对任何不符提出异议。

以上是我们就产品作出的全部保证, 且仅在中国大陆司法管辖区域内适用。本保证不受您特定的法律权利, 根据法律您可能享有其他权利, 本文件的任何内容均不影响您根据法律规定不能排除或限制的消费者权益。

产品保修信息

Table with columns: 产品名称, 保修范围, 部件名称, 保修期(月), 保修服务类型, 备注

注释和说明: (1)此表是针对产品保修范围的描述, 产品保修范围以产品说明书为准; (2)保修服务由授权维修机构提供, 保修服务不涵盖人为损坏、滥用或不当使用造成的损坏; (3)如产品原有所标识标签被更改或损毁, 本保证将失效。产品及随附物料的良好和齐备不属保证范围, 您应在接收产品时当场检验并对任何不符提出异议。

