



赤度

赤无度 · 克无界

深圳市赤度科技有限公司

地址: 深圳市光明区公明街道公明社区长春中路98号... 电话: 0755-33922600

版权声明

CIDOO 商标和其它赤度商标均由赤度公司所有... 未经许可, 不得复制或仿造

Shenzhen Cidoo Technology Co., Ltd. Add: 10A, Building 26, Changshun Garden, Changshun Road, Gongming Community, Guangming Street, Guangming District, Shenzhen City, Guangdong Province, China



Copyrights and statements: CIDOO 商标 and other cidoo trademarks are owned by Cidoo company and may have applied for registration. All other trademarks are the property of their respective owners and Cidoo is not responsible for any errors that may appear in this product.

产品有害物质名称及含量

为满足《电器电子产品有害物质限制使用管理办法》(中华人民共和国工业和信息化部第32号令)的相关规定和要求, 本产品中含有有害物质, 按部件分类, 声明如下:

Table with columns: 部件名称, 铅(Pb), 汞(Hg), 镉(Cd), 六价铬(Cr(VI)), 多溴联苯(PBBs), 多溴二苯醚(PBDEs)

本产品所含有的有害物质都是由现阶段技术限制而找不到可供替代的物质导致的, 符合中国《电器电子产品有害物质限制使用管理办法》的要求

保修卡

在购买产品时, 请完整清楚地填写下列信息, 并加蓋銷售章, 以保障您的合法权益

Table with columns: 客户信息, 产品信息, 销售商信息, 联系电话, 通信地址, 电子邮箱, 销售日期, 发票号码, 联系电话, 联系编码

注: (1) 此表应由销售商盖章确认; (2) 对于适用相关三包规定的产品, 本保修卡等同三包凭证; (3) 维修记录以授权服务机构维修凭证为准

欢迎您选购赤度 V21机械键盘, 希望您使用愉快, 功能操作说明请参以下内容。

灯光设置按键

- FN+ : 背光灯效亮度增加 FN+ -: 背光灯效亮度减小 FN+ / : 背光灯色相减 FN+ * : 背光灯色相加 FN+ ENTER : 切换背光灯效 FN+ 7 : 背光灯效速度减小 FN+ 8 : 背光灯效速度增加 FN+ 6 : 背光灯饱和度和减 FN+ 5 : 背光灯饱和度和加 FN+ Backspace : 关闭/开启按键区背光灯 FN+ 0 : 长按FN+0 三秒键盘恢复到出厂设置

多媒体按键

FN+9 : Windows 系统 FN+ : Mac 系统 右上旋钮开关顺时针旋转为音量加, 逆时针旋转为音量减, 下压为静音

有线/蓝牙5.0/2.4G 三种模式连接方法

有线模式: 请将键盘左上角三段拨动开关打至中间USB处, 并将USB线插入到你的电脑设备中

蓝牙模式配对方法

- 1.V21 蓝牙键盘最多可同时连接3个蓝牙设备... 2.在要连接的设备上打开蓝牙... 3.键盘与你的设备连接成功后, 对应按键指示灯会停止闪烁并亮起背光

短按FN-1或者FN-2或者FN-3可切换已经配对好的蓝牙设备。

关闭键盘电源开关蓝牙断开, 重新打开电源开关, CIDOO V21会默认回到蓝牙断开前使用的设备

2.4G模式使用方法

请将键盘左上角三段拨动开关打至右边靠近接收器位置, 此时4键会闪烁绿色, 并将接收器插入电脑USB接口中

2.4G对码连接方法

键盘出厂默认已经完成2.4G对码, 如果需要重新配对, 可按如下方法重新对码

自动休眠模式

蓝牙和2.4G模式时, 键盘无按键操作5分钟后背光关闭, 按任意按键唤醒键盘

充电指示灯


当键盘的电池电量低时(电池电量小于3.5V) FN键会持续闪烁红灯, 充电时FN键会常亮红灯

自定义设置

赤度 V21支持VIA 程序改键布局


VIA 安装步骤如下:

- 1.请访问https://github.com/WestBerryVIA/via-releases/releases选择您需要的最新的VIA软件然后下载并安装在电脑上 如下图

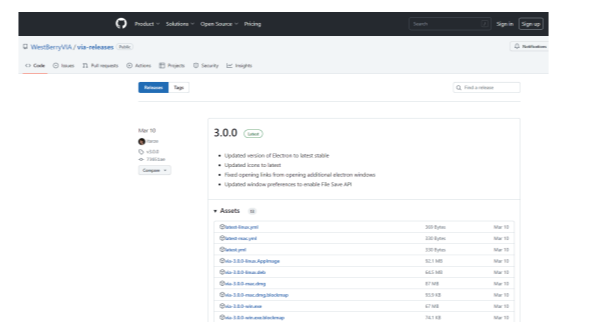

2.从赤度官网下载CIDOO V21-2.4G.JSON或者CIDOO V21-USB.JSON文件

并上传到VIA软件, 网址为: WWW.CIDOO.COM, 打开VIA软件后, 选择File, 再选择Import Keymap

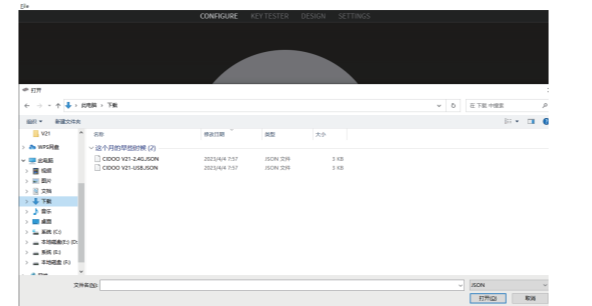

3.如下画面表示VIA软件安装完成并成功连接。



如果VIA软件无法识别您的键盘, 请联系我们的客服人员寻求帮助

如果您的键盘已经插入VIA会自动检测您的键盘是否兼容。键盘记忆是持久的, 这意味着无论你在哪里插入键盘, 它都会记住设置。

在VIA软件页面上半部分, 鼠标点击选择你想要更改的按键, 然后再用鼠标点击VIA软件页面下半部分中你想要更改的按键, 该按键功能生效。

更多设置板块请见以下说明:

宏设置 CIDOO V21按键中没有设置多媒体按键, 在此可以通过VIA软件映射多媒体按键到你想要的按键上, 实现多媒体快捷操作

灯光

CIDOO V21 VIA软件中默认提供了多种不同的RGB灯光效果, 你可以在上面改变灯光亮度, 速度, 颜色以及定制你自己想要的灯光效果

其他客制化

CIDOO V21提供其他功能按键的客制化改键 CIDOO V21默认定制0-3层键盘布局图

层0: 当你使用键盘连接到Win/Mac系统设备时, 层0将被激活使用 层1: 当你使用键盘连接到Mac系统设备时, 层0将被激活使用




层1: 当你使用键盘连接到Win/Mac系统设备时, 长按Fn1(3)按键层1将被激活使用



层2: 当你使用键盘连接到Win/Mac系统设备时, 通过VIA改键设置任意按键为MO(2)保存后, 长按MO(2)按键层2将被激活使用



层3: 当你使用键盘连接到Win/Mac系统设备时, 通过VIA改键设置任意按键为MO(3)保存后, 长按MO(3)按键层3将被激活使用

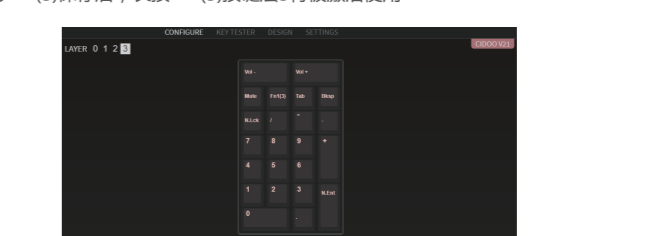


按键说明

Table mapping keyboard keys to functions: Hue+, Sat-, RGB Md+, RGB Tog..., Win..., Mac..., Hue-, Sat-, BT 1, BT 2

V21 PRO

VIA Aluminum Mechanical Numeric Keypad

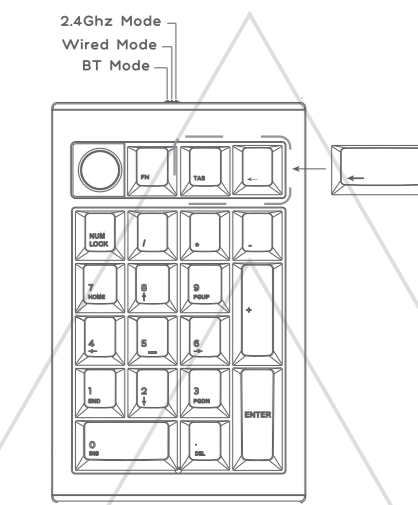

Cidoo VIA Tri-mode Aluminum Mechanical Keyboard A Customizable Keyboard that Supports VIA Software

Thank you for purchasing CIDOO V21 mechanical keyboard, we hope you will be pleased with both the product and service you received.

Default Hot Keys Hold FN + listed keys to activate

- LED keys FN+ +: LED backlight brightness increase FN+ -: LED backlight brightness decrease FN+ 7 : LED backlight speed decrease FN+ 8 : LED backlight speed increase FN+ENTER : Toggle LED backlight mode FN+ Backspace : Turn off/on the backlight (Number key zone) FN+* : LED backlight hue increase FN+/: LED backlight hue decrease FN+ 5: LED backlight saturation increase FN+ 6 : LED backlight saturation decrease FN+ 0 : Long press FN+ 0 for 3 seconds to reset the keyboard to the factory setting.

Media Keys

FN+9: Windows system FN+ : MAC system The upper left knob switch rotates clockwise to increase volume, counterclockwise to decrease volume, and presses down to mute

USB Wired/BT5.0/2.4G Tri Mode

Wired Mode: Please toggle the mode switch to the middle wired mode, and then

insert USB cable into your computer, the keyboard backlight lights on and turns to the default of RGB backlight effect, it means connection successful.

Bluetooth® Pairing Instructions:

- 1.CIDOO V21 mechanical keyboard can connect up to 3 devices at the same time. Please toggle the mode switch to the Bluetooth mode. And long press FN + 1 or FN+2 or FN+3 for 3-5 seconds to enter pairing mode. At this time, the 1/2/3 key flashes blue quickly indicate that its ready to connect. 2.Open the Bluetooth settings on your device and scan for available devices. Locate and select any device name of three group "CIDOO V21-1 " "CIDOO V21-2", "CIDOO V21-3 " 3. Once the keyboard has connected to your device, the 1/2/3 key will cease flashing, and indicating that Bluetooth pairing was successful. Short press "FN + 1" or "FN+2" or "FN+3" to switch paired Bluetooth device.

The Bluetooth connection has memory. It will disconnect when power off the keyboard, and the keyboard will re-connect to the last device when power on the keyboard again.

2.4Ghz Wireless Connection:

- 1.Please toggle the mode switch to 2.4Ghz mode. Plug in the receiver into your device. The "4" key led will light on green for 3 seconds and whole keyboard backlight light on indicates that 2.4G connected successfully.

2.4Ghz pairing instruction

The keyboard 2.4Ghz mode is default paired. If you need to re-pair 2.4Ghz mode, Please perform the following operations:

Long press "FN+4 " to enter 2.4g pairing mode. At this time, the "4" key flashes green color quickly. Insert 2.4G dongle to USB port. After the connection is successful, the "4" key stops blinking.

Auto Sleep Mode

After 5 minutes without a keypress, the backlighting will turn off to conserve battery. Any keypress will light on backlight.


After 30 minutes without a keypress, the keyboard entry deep sleep under Bluetooth mode, Bluetooth disconnect, any keypress will exit deep sleep mode, RGB lights turn on, and the Bluetooth re-connect to keyboard

Battery Charging:


FN key will blink red repeatedly when the keyboard is low on battery (battery voltage less than 3.5V). It will stay red light when charging, and FN key will turn to the default RGB backlighting after fully charged.

Custom Configuration


CIDOO V21 supports remap the keys via VIA firmware in wired mode and 2.4G mode Note: Make sure your keyboard is properly plugged into your computer device VIA installation steps are as follows: 1.Please visit https://github.com/WestBerryVIA/via-releases/releases to download the latest VIA application for your computer's OS here. As following photo shows:

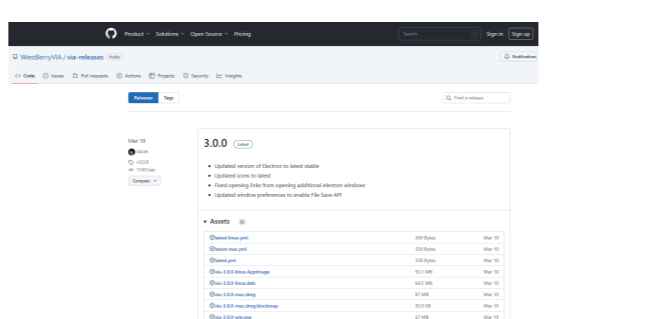

2.Download CIDOO V21 2.4G.JSON and CIDOO V21 .JSON files from CIDOO official website WWW.CIDOO.COM, and open VIA Software, Click File, and click Import Keymap, and then select the right JSON file accordingly. See following photo. (Note : Please use USB.JSON files in wired mode. Use 2.4G.JSON in 2.4G mode)

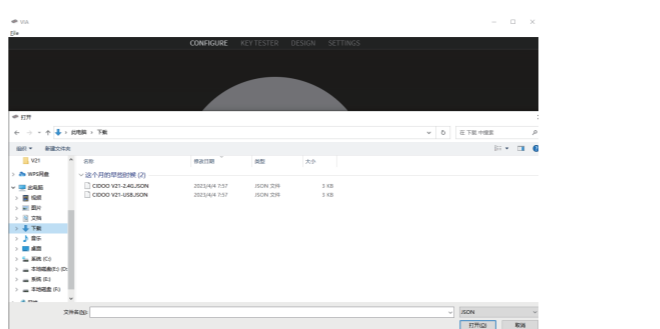

3.Installation is completed and VIA software connected successfully if it is show as below photo.

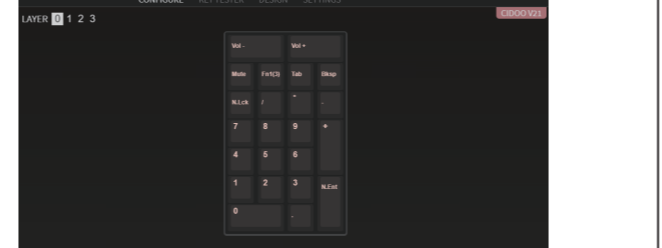

If VIA software does not recognize your keyboard, please contact our customer service staff for assistance.

VIA automatically detects your keyboard compatibility if it's plugged in. Keyboard memory is persistent, which means that wherever you plug in keyboard, it remembers the settings.

On the top half of VIA software, choose one key which you want to change by your mouse, and then select the key on the bottom half of VIA software, and it was effected.

See below for more information about configuration Macros setting

CIDOO V21 does not have physical multimedia keys, you can remap the keys through the VIA software to achieve the function.

CIDOO V21 is configured with 4 layers from 0 to 3 by default, and each individual key can have multiple functions.

This is important for smaller keyboards, where there aren't enough physical keys to do all the functionality you need.

Special keys setting

Here you can remap the key to replace the special key to the key you want, to achieve the quick operation of the function.

LED light

CIDOO V21 VIA software provides many different RGB lighting effects by default. You can change the lighting brightness, speed, color and customize the lighting effect you want. You can also change the key to operate the lighting effect you set.

Others custom

CIDOO V21 Layers allow you to configure your keyboard with more behaviors than its number of physical keys.

CIDOO V21 default customized 0-3 layer keyboard layout.


Layer0 : This layer will be activated when the keyboard to be connected to the Win system device Layer0: This layer will be activated when the keyboard to be connected to a Mac system device



Layer1 : This layer will be activated when your keyboard's system toggle switched to Windows or Mac system and long press Fn1(3) key.



Layer2 : This layer will be activated when your keyboard's system toggle switched to Windows or Mac and key mapped any keys to MO(2), save and then long press it.

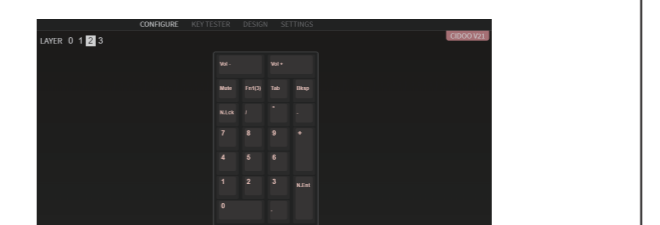

Layer3 : This layer will be activated when your keyboard's system toggle switch to Windows or Mac, key mapped any keys to MO(3), save and then long press it.



Keys Descriptions:

Table mapping keyboard keys to functions: Hue+, Sat+, RGB Md+, RGB Tog..., Win..., Mac..., Hue-, Sat-, BT 1, BT 2, BT 3, Bright+

保修声明

感谢您对我产品的信任与支持, 为了您放心使用本产品, 更好地保障您的权益, 我们将严格遵守并执行相关规定, 实行售后相关服务: 服务内容: 按国家规定计算机商品维修更换退货责任规定进行服务

Table with columns: 产品名称, 保修范围, 部件名称, 保修期(月), 保修服务类型, 备注

注: 1. 本保修卡不适用于非指定或限制的产品; 2. 本保修卡不适用于非指定或限制的产品; 3. 本保修卡不适用于非指定或限制的产品

