



深圳市赤度科技有限公司

地 址：深圳市光明区公明街道公明社区长泰中路98号
长泰花园26栋104
电 话：0755-33922600
网 址：CIDOO.COM
执行标准：GB14081-2010
中国制造/Made in China

版权及声明：© CIDOO 所有和其他赤度商标均归赤度公司所有，并已经申请注册。所有其它商标均归其各自所有者的财产。赤度对于本产品中可能出现的问题不承担任何责任。本产品中包含的信息如有更改，请以实物为准。恕不事先通知。

Shenzhen Cidoo Technology Co., Ltd.
Add: 104, Building 26, Changtun Garden, Changtun Road, Gongming Community, Gongming Street, Guangming District, Shenzhen City, Guangdong Province, China
Tel: +86-755-33922600
Website: CIDOO.COM
Executive Standard: GB14081-2010

Copyrights and statements: © CIDOO and other cidoo trademarks are owned by Cidoo company and may have applied for registration. All other trademarks are the property of their respective owners, and Cidoo is not responsible for any errors or omissions that may appear in the product. All pictures shown are for illustration purpose only and the characteristics of the product may vary without prior notice.



产品有害物质名称及含量

为满足《电器电子产品有害物质限制使用管理办法》（中华人民共和国工业和信息化部第32号令）的相关规定和要求，本产品中有害物质，按部件分类，声明如下：
产品中有害物质的名称及含量

部件名称	有害物 质 / Hazardous Substance				
	铅 (Pb)	汞 (Hg)	六价铬 (Cr(VI))	多溴联苯 (PBBs)	多溴二苯醚 (PBDEs)
电脑板组件	×	○	○	○	○
键盘外壳	○	○	○	○	○

注：本表格依据GB/T 11364.4的规定编制。

○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。

×：表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求。

本产品所含有的有害物质主要是由于前期阶段技术限制而找不到可替代的物质导致的，符合中国《电器电子产品有害物质限制使用管理办法》的要求。且基于欧盟RoHS豁免范围内，在设计产品时已经做了特别考虑，确保外部零件采用无毒无害的环保材料制造，消费者在正常使用情况下不会接触到有害物质，不会对人体造成危害。如有更改，请以实物为准。恕不事先通知。

在中华人民共和国境内销售的电器电子产品上印有“环保使用指南”（EUPP）符号，符号中的数字代表产品的正常环保使用期限。

用户信息	电子邮箱	销售日期
姓名		
产品型号	联系电话	
商家名称	联系地址	
销售商信息	邮政编码	

注：
(1) 本产品由销售商盖章确认。
(2) 对于可适用相关“三包”规定的产品，本保修卡等同于“三包凭证”。
(3) 维修站以国家授权服务机构维修凭证为准，申请售后服务，请妥善保管。

欢迎您选购CIDOO V68机械键盘，希望您使用愉快，功能操作说明请参以下内容。

FN-A: Windows 系统 FN-S: Mac 系统
FN-1!: F1 FN-2@: F2
FN-3# F3 FN-4\$: F4
FN-5% F5 FN-6^: F6
FN-7& F7 FN-8< F8
FN-9(F9 FN-0) F10
FN-+; F11 FN-=+ F12
FN-WIN: 锁定/解锁 WIN键 FN-PG DN:DELETE
FN-ESC: 长按FN-ESC三秒键盘恢复到出厂设置
FN-ENTER 切换屏显示界面 FN-X 一键打开/关闭屏幕

灯光设置按键

FN-1: 背光灯效亮度增加 FN-1: 背光灯效亮度减小
FN-[: 背光灯效速度减小 FN-]: 背光灯效速度增加
FN-BACK SPACE :关闭/开启背光灯 FN-\\: 切换背光灯效
FN-+; : 背光灯色相减 FN-+; : 背光灯色相减
FN-+; : 背光灯饱和度减 FN-+; : 背光灯饱和度减
FN-K: 切换左侧圆形LOGO灯光效果 FN-L: 切换左侧圆形LOGO颜色

有线/蓝牙5.0/2.4G 三种模式连接方法

有线模式：
请将键盘左上角三段拨动开关打开至中间USB处，并将USB线插入到你的电脑设备上，键盘屏幕亮起，则表示连接成功。

蓝牙模式配对方法：

请按照以下步骤将键盘和您的设备进行蓝牙配对

1.CIDOO V68蓝牙键盘最多可同时进行3个蓝牙设备。打开键盘上部中间三段拨动开关至左边位置。此时屏幕显示指示闪烁。按住 FN + Q 或者按住 FN + W 或者按住 FN + E 3-5秒。当屏幕上对应设备指示开始快速闪烁BT1/BT2/BT3 表示键盘在可连接状态。
2.在要连接的设备上打开蓝牙，搜索并选择其中一组FN + Q对应设备名CIDOO V68-1，FN + W对应设备名CIDOO V68-2，FN + E对应设备名CIDOO V68-3，点击连接配对。
3.键盘与你设备连接成功后，对应屏幕设备指示会停止闪烁并亮起，短按FN-Q或者FN-W 或者FN-E键可切换已经配对的蓝牙设备。

关闭键盘电源开关蓝牙断开，重新打开电源开关，CIDOO V68会默认回到蓝牙断开前使用的设备

2.4G模式使用方法：

请将键盘左上角三段拨动开关打至右边位置，此时屏幕2.4G模式指示图标会快速闪烁，并将接收器插入电脑USB接口中，此时设备指示停止闪烁并长亮显示，则表示2.4G设备已连接成功。

2.4G模式对码方法：

键盘出厂默认已经完成2.4G对码，如果需要重新配对，请按如下方法重新对码：长按FN-R 3-5秒，屏幕中2.4G图标快速闪烁，再将接收器插入USB 接口，停止闪烁则表示对码成功。

自动休眠模式

蓝牙和2.4G模式时，键盘无按键操作3分钟后背光和屏幕关闭，按任意按键唤醒键盘
蓝牙模式下，键盘无按键操作30分钟后进入深度休眠模式，蓝牙断开，按任意按键将退出深度休眠模式，屏幕亮起并连蓝牙


充电指示灯：

当键盘的电池电量低时（电池电量小于3.3V）屏幕提示低电量
充电时屏幕右上角显示键盘在充电状态


屏幕换图设置：

CIDOO V68共有两组用户自定义可替换，可导入图片和导入动画


第一步：从官网下载替换动画的APP：Image Custom Tool，然后安装至电脑

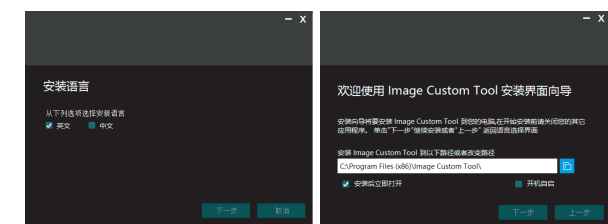

第二步：打开安装好的Image Custom Tool，选择导入动画或导入图片，点击上传所有帧即可自定义动画或图片。



此外，除了可以导入现有的图片和动画之外，还可以通过Image Custom Tool里的画笔功能自行画图再上传到显示屏上。详见以下步骤

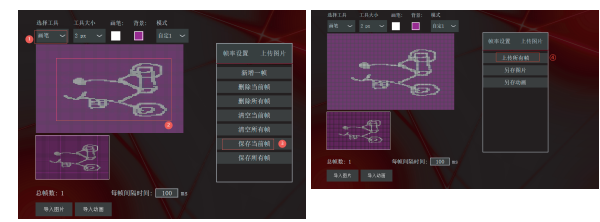

PS :如需要校准CD上的时间，可以通过打开替换动画软件Image Custom Tool 自动校准。

自定义设置

CIDOO V68支持VIA 程序改布局

注意：请确保您的键盘已正确插入电脑设备

VIA 安装步骤如下：

1.请访问<https://github.com/WestBerryVIA/via-releases/releases> 下载最新的VIA应用程序到您的计算机的OS上。打开后点击Use V2 definitions (deprecated)的按钮，如下图所示



如果VIA软件无法识别您的键盘，请联系我们的客服人员寻求帮助

如果您的键盘已经插入VIA会自动检测您的键盘是否兼容。键盘记忆是持久的，这意味着无论你在哪里插入键盘，它都会记住设置。

在VIA软件页面上半部分，鼠标点击选择你想要更改的按键，然后再用鼠标点击VIA软件页面下半部分中你想要更改的按键，该按键功能生效。

更多设置板块请见以下说明：

宏设置

CIDOO V68默认配置了0-3层4个层级，每个单独的按键都可以拥有多个功能。这对于较小的键盘很重要，因为它们没有足够的按键来实现所需的所有功能。
特殊键设置
在此可以设置按键变更功能将特殊键替换到你想要的按键上，实现该功能的快速操作。

其他定制化

CIDOO V68提供其他功能按键的定制化按键
CIDOO V68默认定制了0-3层键盘布局图
层0：当你使用键盘连接到Win/Mac系统设备时，层0将被激活使用
层0：当你使用键盘连接到Mac系统设备时，层0将被激活使用，其中按键Left Alt+Left Option Left Win+Left Command Right Alt+ Right Option



层2：当你使用键盘连接到Win/Mac系统设备时，通过VIA改键设置任意按键为MO(2)保存后，长按MO(2)按键层2将被激活使用



层3：当你使用键盘连接到Win/Mac系统设备时，通过VIA改键设置任意按键为MO(3)保存后，长按MO(3)按键层3将被激活使用




按键说明

Hue+	灯效色相加	BT 3	蓝牙设备3对码
Sat-	灯效饱和度-	Bright+	键盘背光亮度+
RGB Md.	下一个RGB灯效模式	Lock Win	锁定Windows键
RGB Tog.	关闭/开启背光灯效	USB Mode	切换USB传输模式
Win...	切换Windows+模式	RGB SPD	RGB灯光速度-
Mac...	切换Mac模式	Bright-	键盘背光亮度-
Hue-	灯效色相减	RGB SPI	RGB灯光速度+
Sat.	灯效饱和度+	Fn(3)	长按Fn(3),层1将激活
BT 1	蓝牙设备1对码	MO(2)	长按MO(2),层2将激活
BT 2	蓝牙设备2对码	MO(3)	长按MO(3),层3将激活

V68

Alice VIA Tri-mode TFT-LCD CNC Aluminum Mechanical Keyboard

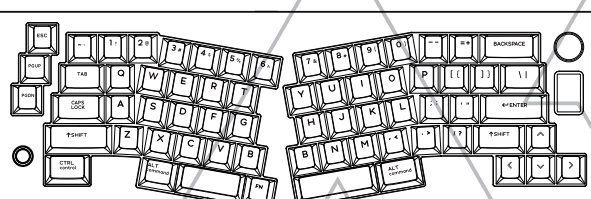

minimalistic design inheriting the originality style
THIS IS EXACTLY WHAT I LIKE THANK YOU

Thank you for purchasing CIDOO V68 mechanical keyboard ,We hope you will be pleased with both the product and service you received .The following is a detailed introduction of the functions and operation method of this product.

Default Hot Keys

Hold FN+ listed keys to activate

FN+A: Windows System FN+S: Mac System
FN-1!: F1 FN-2@: F2
FN-3# F3 FN-4\$: F4
FN-5% F5 FN-6^: F6
FN-7& F7 FN-8< F8
FN-9(F9 FN-0) F10
FN-+; F11 FN-=+ F12
FN-WIN: Lock/Unlock WIN FN-PG DN:DELETE
FN-ESC: Long press FN-ESC for 3 seconds to reset the keyboard to the factory setting.
FN-ENTER : Toggle LCD profile FN-X : ON/OFF LCD

Backlight Setting

FN+1: LED backlight brightness Increase
FN+]: LED backlight brightness decrease
FN+[: LED backlight speed decrease
FN+>: LED backlight speed increase
FN+Backspace :Turn off/on the backlight
FN+\\: Toggle LED backlight mode
FN+<: LED backlight hue increase
FN+<: LED backlight hue decrease
FN+<: LED backlight saturation increase
FN+<: LED backlight saturation decrease
FN+K: Toggle circle logo backlight mode
FN+L: Toggle circle logo backlight color

USB Wired/BT5.0/2.4G Tri Mode Connection :

Wired Mode:

Please toggle the mode switch to the middle (wired mode) (From left to right are BT→Wired→2.4Ghz) and then insert USB cable to your computer, the LCD lights on which means the connection is successful.

Bluetooth® Pairing Instructions:

Perform the following steps to pair this keyboard with your device(s).
1.CIDOO V68 Bluetooth keyboard can be paired with up to three devices at the same time. Please toggle the mode switch to the Bluetooth mode. (From left to right are BT→Wired→2.4Ghz) , Long press FN + Q or FN+W or FN+E for 3-5 seconds to enter pairing mode. At this time, Screen will flash BT1/BT2/BT3 icon quickly indicates that keyboard is ready to connect.
2.Open the Bluetooth settings on your device and scan for available devices. Locate and select the device name entry, "CIDOO V68-1" for FN+Q, "CIDOO V68-2" for FN+W, "CIDOO V68-3" for FN+E .
3.Once the keyboard has connected to your device, the screen device icon will cease flashing and light on indicates Bluetooth pairing was successful. Short press "FN" and "Q" or "FN" and "W" or "FN" and "E" keys to switch paired Bluetooth device.

The Bluetooth connection has memory . It will disconnect when power off the keyboard, and the keyboard will re-connect to the last device when turned on .

2.4Ghz connection Instruction:

1.Please toggle the mode switch to 2.4Ghz mode . From left to right are BT→ Wired→2.4Ghz. Screen will flash 2.4G icon quickly
2.Plug the receiver into USB port of the device ,2.4G icon will cease flashing to your PC .

and light on which means the connection is successful.

2.4Ghz pairing Instructions:

The keyboard 2.4Ghz mode is default paired .If you need to re-pair 2.4Ghz mode ,please perform the following operations :

Auto sleep mode

Long press FN+R key to enter 2.4G pairing mode .At this time ,The screen will flashes 2.4G icon quickly .Insert 2.4G dongle to USB port .After the connection is successful, the screen will stop blinking

Auto sleep mode

In Bluetooth mode, the deep sleep mode will be entered after 30 minutes without key press, and the Bluetooth is disconnected. Press any key to exit the deep sleep mode, the LCD will turn on and re- connect to Bluetooth.

Battery Charging Indicator:



When the battery power of the keyboard is low (the battery power is less than 3.5V), the battery icon of the screen will become red .Also , screen will show charging icon when keyboard is charging .

LCD Setting


Custom the wallpaper

CIDOO V68 supports to custom animation and static picture. Total 2 sets can be custom .



Step 1 : Please download Image Custom Tool from distributor and install it to your PC .

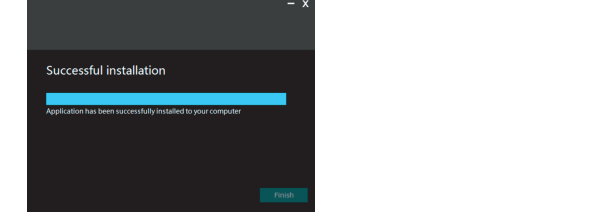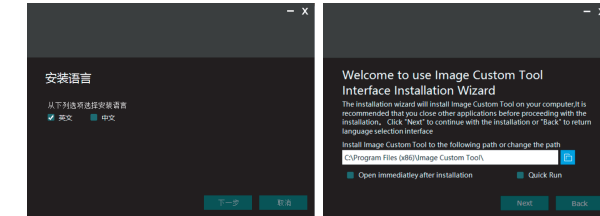

Step 2 : Open Image Custom Tool APP and click Picture or Animation , select it and open , and click uploading all frame . See below :

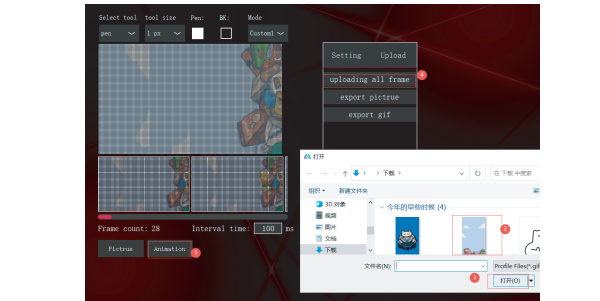

In addition to importing the existing pictures and animations, you can also use the pen to paint the picture that you want and uploading them to LCD . See the following steps

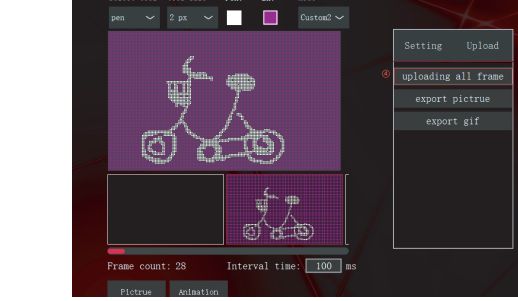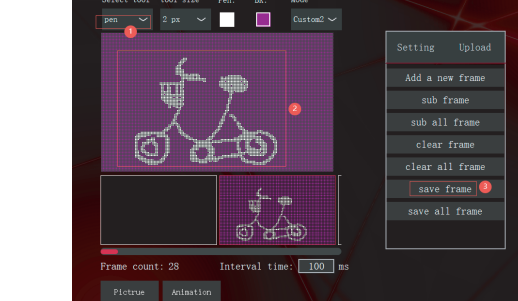




PS :If you need to calibrate the time of LCD ,Time Synchronization will be done once you open the Image Custom Tool APP .

Custom Configuration

CIDOO V68 supports using the VIA program to change key layout

Note: Make sure your keyboard is properly plugged into your computer . VIA installation steps are as follows:

1.Please visit <https://github.com/WestBerryVIA/via-releases/releases> to download the latest VIA application for your computer's OS here. Open VIA software and pls click Use V2 definitions (deprecated) As following photo As following photo shows:

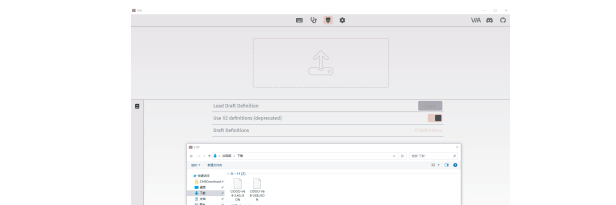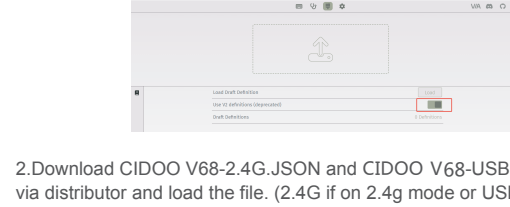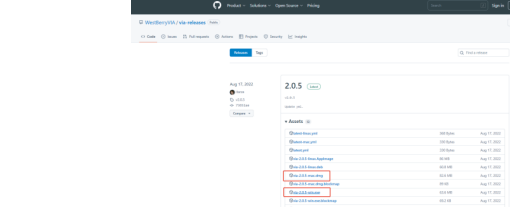

3.Installation is completed and VIA software connected successfully if show below picture .



If the VIA software cannot recognize your keyboard, please reach out our support to get the instruction.

VIA automatically detects your compatible keyboard if it's plugged in. Keyboard memory is persistent, which means that wherever you plug in keyboard, it remembers the settings.

On the top half of VIA software, choose one key by your mouse, and then select the key that you wanted on the bottom half of VIA software, and it was effected. Firstly switch to VIA software key tester table, there is not any background color before you press any keys, when you want to test this key you have programmed, press it and the background color will change to red color means it works, otherwise it is not work.

See below for more information about configuration

Macros setting

CIDOO V68 is configured with 4 layers from 0 to 3 by default, and each individual key can have multiple functions. This is important for smaller keyboards, where there aren't enough physical keys to do all the functionality you need.
Special keys setting
Here you can remap the key to replace the special key to the key you want, to achieve the quick operation of the function.



Layer 3: When the keyboard connect to Win/Mac system device, remapped any keys to MO(3),long press MO(3) key ,layer 3 will be activated .



Key description

Hue+	Hue Increase	BT 2	Bluetooth Device 2
Sat+	Light Saturation+	BT 3	Bluetooth Device 3
RGB Md.	Next RGB Mode	Bright+	Backlight Increase
RGB Tog.	Toggle RGB ON/OFF	Lock Win	Lock Windows Key
Win...	Windows Mode	USB Mode	USB mode
Mac...	Mac Mode	RGB SPD	RGB Speed Decrease
Hue-	Light Saturation-	Bright-	Backlight Decrease
Sat-	Light Saturation-	RGB SPI	RGB RGB Speed Increase
BT 1	Bluetooth Device 1		
Fn(3)	Layer 1 will be activated when holding this key		
MO(2)	Layer 2 will be activated when holding this key		
MO(3)	Layer 3 will be activated when holding this key		

保修声明

感谢您对我产品的信任与支持，为了您放心使用本产品，更好地保障您的权益，我们将严格遵守并执行相关规定，实行售后相关服务。服务内容包括：按照计算机商品维修更换退货责任和认定程序服务。以下不属于服务之范围：

- (A) 误用、滥用或不适当的运输。
- (B) 维修或故障，导致损坏或不适当的使用、温度或其他不当条件下使用。
- (C) 非授权人员擅自维修或改装。
- (D) 任何第三方产品或服务。
- (E) 将产品用于非指定或预期目的。
- (F) 以其他违反产品使用说明书的方式使用。产品使用过程中发生的正常损耗或老化、磨损、老化以及使用不当、拆卸或其他非正常使用导致的问题不属于保修范围。如产品原有识别标签被更改或损毁，本保证将失效。产品及随附材料的完好和齐备不属保证范围。您应在接收产品时当场检验并对此不符提出异议。本保证不适用于任何法律程序，根据适用法律可能还有其他的权利。本文件的结构内容均不能构成根据法律规定的不能排除或限制的消费者权利。

产品保修信息

产品名称	保修范围	部件名称	保修期（月）	保修服务类型	备注
CIDOO V68	主要部件	键盘	12	取送维修	

注：保修和退换货
(1) 保修期内产品出现质量问题，产品经维修站确认产品属于保修。
(2) 保修期外产品出现质量问题，维修站将根据实际情况，酌情收取维修费用及运费。如产品经维修站确认产品属于保修，维修站将根据实际情况，酌情收取维修费用及运费。如产品经维修站确认产品属于保修，维修站将根据实际情况，酌情收取维修费用及运费。

