


# User Manual of KW75 Triple Mode Mechanical Keyboard With Dual Operation Systems

## Product Summary

### 1-1.Product Design

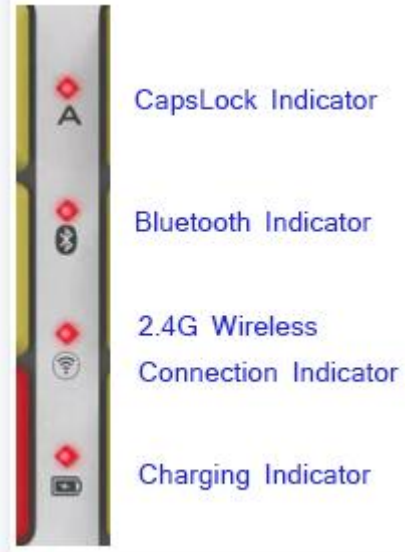

## **Size & Weight**

Size: 333\*143\*43MM

Weight: 867±10G(not including cable)

## **Product Specification:**

81/82 Keys US/UK Layout Mechanical Keyboard

With Built-in Silicone Cushion

Hot Swappable Mechanical Switch

Detachable TYPE-C Charging Cable

Triple Connection Modes & Dual Operation Systems

Full Keys Anti-ghosting

All Keys Programmable By Driver

## **FN Combined Keys & Backlight Management**

### **2-1. FN Combined Multimedia Function**

FN + F1= Open Music App

FN + F2= Reduce Volume

FN + F3= Increase Volume

FN + F4= Mute

FN + F5= Stop

FN + F6= Previous Track

FN + F7= Play/Pause

FN + F8= Next Track

FN + F9= Open Email

FN + F10=Go to Homepage

FN + F11=Open My Computer

FN+F12=Open Calculator

### **2-2.RGB LED Control**

FN+PGDN: Turn On/Off the Backlight, please be sure the backlight is turning on if you need adjust the backlight

FN+2: Green Backlight

FN+3: Blue Backlight

FN+4-8: Self-Defined Backlight Mode

FN+PGUP: Backlight Setting & Save

When press FN+4 to 8 to enter into the corresponding mode, it would start self-setting after pressing FN+PGUP.

Press the same key continuously until the backlight color changed to the specified one, then start setting other keys. If all the keys setting is finished, please press FN+PGUP to save. The CapsLock indicator keeps flashing while setting the backlight, and it would be off after the setting is finished and saved.

FN+Ins: Change Backlight Modes, Total 19 Modes

FN+Del: Change the backlight color (7 Pure Colors Available)

FN+↑: Increase Brightness (if up to the highest level, the white backlight of Caps Lock key is flashing)

FN+↓: Decrease Brightness (if up to the lowest level, the white backlight of Caps Lock key is flashing)

FN+←: Decrease Backlight Breathing Speed (if up to the lowest level, the white backlight of Caps Lock key is flashing)

FN+→: Increase Backlight Breathing Speed (if up to the highest level, the white backlight of Caps Lock key is flashing)

## 2-3 Combined Control Function

FN+ESC: Restore Factory Defaults

FN+Win: Lock the Windows Key and the backlight turns white

## Operation Systems Instructions

On top left side of the keyboard, there are two switches which are used to change the connection mode and operation system.

### 3-1. 2.4G Wireless Connection

Change to 2.4G wireless connection mode while switch to the left, and the 2.4G indicator turns on. Plug the receive to USB output and it starts the connection automatically.

### 3-2. Wired Connection

Change to wired USB C connection mode while switch to the middle

### 3-3. Bluetooth Connection

Change to Bluetooth connection mode while switch to the right

FN+Q: Bluetooth 1 Name: KW75\_1

FN+W: Bluetooth 2 Name: KW75\_2

FN+E: Bluetooth 3 Name: KW75\_3

Press FN key, you will find the current connection status from the green light of below keys.

Bluetooth connection mode:

BT1: "Q" Key

BT2: "W" Key

BT3: "E" Key

USB connection mode: "T" Key

2.4G connection mode: "R" Key

### **3-4.Operation Systems Switch between Windows and Mac OS**

Change to Windows system while switch to left and change to Mac OS while switch to right. The function of Win Key and Alt Key will be interchanged under Mas OS.

### **Knob Function Instruction**



: Support Brightness Adjustment and Volume Control, and Press the knob, you could change the working mode.

#### **How to use the knob:**

Turn left to decrease the brightness and turn right to increase the brightness, and it would restore the default brightness later

After press the knob, it changes to volume control mode, turn left to decrease the volume and turn right to increase the volume.

### **Rating**

Mac OS X10、12、 iOS10 or later version

Voltage: 5V

Current: 200MA(Top Brightness)/20MA (Off Backlight)

### **Hibernation Mode**

When connect the keyboard to the device, it would move to hibernation mode if no operation more than 5 minutes, press any key to wake up and back to the working status.