



赤度 · 无边界

深圳市赤度科技有限公司
地址：深圳市光明区公明街道公明社区长春中路98号
长春花园26栋104
电话：0755-33922600
网址：(cidoo.com)
执行标准号：GB14081-2010
中国制造/Made in China

版权声明：CIDOO 赤度 和其他赤度商标均归赤度公司所有，开已申请注册，所有其它标志均是其各自所有者的财产，赤度对于本产品中可能出现的所有错误不承担任何责任，本产品中包含的信息如有更改，请以实物为准，恕不事先通知。

Shenzhen Cidoo Technology Co., Ltd
Address: 104, Building 26, Changchun Garden, Changchun Road, Gongming Community, Gongming Street, Guangming District, Shenzhen City, Guangdong Province, China
TEL: +86-755-33922600
Website: CIDOO.COM
Executive Standard: GB14081-2010



Copyrights and statements: CIDOO and other cidoo trademarks are owned by Cidoo company and may have applied for registration. All other trademarks are the property of their respective owners, and Cidoo is not responsible for any errors that may appear in this product. All pictures shown are for illustration purpose only and the characteristics of the product may vary without prior notice.

产品有害物质名称及含量

为满足《电器电子产品有害物质限制使用管理办法》(中华人民共和国工业和信息化部第32号令)的相关规定和要求，本产品有害物质、按部件分类，声明如下：

产品中有害物质的名称及含量

部件名称	有害物质 / Hazardous Substance					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
电路板组件	X	○	○	○	○	○
键盘外壳	○	○	○	○	○	○

*本表格依据SJ/T 11364 的规定编制。

○：表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572 规定的限量要求以下；
X：表示有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572 规定的限量要求。

本产品所含有的有害物质是由于目前技术水平限制无法可替代的物质导致的，符合中国《电器电子产品有害物质限制使用管理办法》的要求，且属于欧盟RoHS 豁免范围内，在设计产品时已经做了特别考虑，确保外观设计采用无毒无害环保材料制造，并将在正常使用情况下不会对使用者造成伤害，请放心使用或回收。

在中华人民共和国境内销售的电器电子产品上印有“环保使用” (EUP) 符号，圆圈中的数字代表产品的正常环保使用年限。

保修卡

在购买产品时，请完整清楚地填写下列信息，并加盖公章，以保障您的合法权益。

用户信息	联系电话	电子邮箱
姓名	联系地址	邮政编码
产品名称	销售日期	
产品信息	产品型号	发票号码
销售渠道	商家名称	联系电话
销售商信息	销售地址	邮政编码

注：
(1) 此表应由销售商盖章确认。
(2) 对于可能出现的任何错误，赤度不承担任何责任。
(3) 请牢记记录以获取服务和维修凭证为准。申请售后时，请妥善保管。

欢迎您选购赤度V75机械键盘，希望您使用愉快，功能操作说明请参考以下内容。

灯光设置按键

FN+I: 背光灯效亮度增加
FN+O: 背光灯效亮度减小
FN+←: 背光灯色相增加
FN+→: 背光灯色相减小
FN+|: 切换背光灯效
FN+=: 背光灯效速度增加
FN+=: 背光灯效速度减小
FN+|: 背光灯饱和增加
FN+|: 背光灯饱和减小

FN+Backspace: 关闭/开启按键区背光灯
FN+PG UP: LOGO灯切换灯效
FN+PG DN: LOGO灯切换颜色
FN+Space: 长按FN+Space三秒键盘恢复到出厂设置

多媒体按键

FN-A: Windows 系统
FN-F1: 音乐播放器
FN-F3: 音量加
FN-F5: 上一曲
FN-F7: 下一曲
FN-F9: 邮件
FN-WIN: 锁定/解锁 WIN键
FN+HOME-END: Mac 系统
FN-F2: 音量减
FN-F4: 静音
FN-F6: 播放/暂停
FN-F8: 停止播放
FN-F10: 主页
FN-F11: 计算器
FN-WIN: 锁定/解锁 WIN键
FN-DEL: INSERT

旋钮功能：右上旋钮开关顺时针旋转为音量加，逆时针旋转为音量减，下压为静音

有线/蓝牙5.0/2.4G 三种模式连接方法

有线模式：请将键盘左上角三段滑动开关打至中间USB处(从左至右依次为：2.4G→有线→蓝牙并插入到您的电脑设备中，键盘背光灯亮起变为默认的RGB灯光，则表示连接成功。

蓝牙模式配对方法：请按照以下步骤将键盘和您的设备进行蓝牙配对

1.V75 蓝牙键盘最多可同时连接3个蓝牙设备。打开键盘左上角三段滑动开关至左边位置(从左至右依次为：2.4G→有线→蓝牙)。此时Q键或者W键或者E键闪烁。按住 FN + Q 或者按住 FN + W 或者按住 FN + E 3-5秒。当对应按键灯光指示灯开始快速闪烁蓝色，表示键盘已可连接状态。
2.在要连接的设备上打开蓝牙，搜索并选择其中一组FN + Q对应设备名CIDOO V75-1, FN + W对应设备名CIDOO V75-2, FN + E对应设备名CIDOO V75-3, 点击连接配对。
3.键盘与您的设备连接成功后，对应按键指示灯会停止闪烁并亮起背光，短按FN+Q或者FN+W 或者FN+E即可切换已经配对好的蓝牙设备。

关闭键盘电源开关蓝牙断开，重新打开电源开关，CIDOO V75会自动回连到蓝牙断开前使用的设备


2.4G模式使用方法：请将键盘左上角三段滑动开关打至左边靠USB接口位置(从左至右依次为：2.4G→有线→蓝牙)。此时R键会闪烁绿色，并将接收器插入USB接口中，此时R键停止闪烁，背光灯亮起，则表示2.4G设备已连接成功。

2.4G配对方法：键盘出厂默认已经完成2.4G对码，如果需要重新配对，可按如下方法重新对码。长按FN+R 3-5秒，“R”键指示灯闪烁绿色，再将接收器插入USB接口中，“R”键停止闪烁，键盘背光灯亮起变为默认的RGB灯光，则表示对码成功。


自动休眠模式：当键盘的电量电量低时(电量电量小于3.5V) FN键会持续闪烁红灯，充电时FN键会常亮红灯，充满后FN键会熄灭红色并跟随当前按键背光效果

自定义设置

赤度V75支持VIA 程序改键布局
注意：请确保您的键盘已正确插入电脑设备
VIA 安装步骤如下：
1.访问<https://github.com/WestBerryVIA/via-releases/releases>选择您需要的最新的VIA软件然后下载并安装在电脑上。如下图

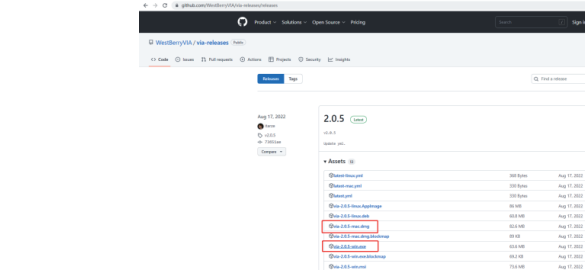

2.从赤度官网下载CIDOO V75-2.4G.JSON或者CIDOO V75-USB.JSON文件并上传到VIA软件，网址为：WWW.CIDOO.COM。打开VIA软件后，选择File，再选择Import Keymap，再选择对应的JSON文件，USB.JSON文件请在有线模式下使用，2.4G.JSON请在键盘2.4G使用模式下使用，如下图

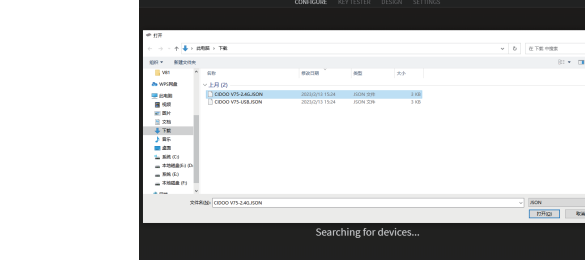

Thank you for purchasing our V75 mechanical keyboard. We hope you will be pleased with both the product and service you received. The following is a detailed introduction of the functions and operation method of this product.

Default Hot Keys
Hold FN + listed keys to activate

LED Setting Keys
FN+1: LED backlight brightness Increase
FN+2: LED backlight brightness decrease
FN+3: LED backlight hue increase
FN+4: LED backlight hue decrease
FN+5: Toggle LED backlight mode
FN+6: LED backlight speed decrease
FN+7: LED backlight speed increase
FN+8: LED backlight saturation decrease
FN+9: LED backlight saturation increase
FN+Backspace: Turn off/on the key area backlight
FN+PG UP: Toggle LOGO LED light mode
FN+PG DN: Toggle LOGO LED light color
FN+Space: Long press FN+Space for 3 seconds to reset the keyboard to the factory setting.

Media Keys
FN+A: Windows System
FN+F1: Music Player
FN+F3: Volume +
FN+F5: Previous
FN+F7: Next
FN+F9: Email
FN+F11: Calculator
FN+WIN: Lock /Unlock Win
FN+HOME-END: Make sure your keyboard is properly plugged into your computer. VIA installation steps are as follows:

USB Wired/BT5.0/2.4G Tri Mode Pairing Method:

Wired Mode:
Please toggle the mode switch to wired mode. (From left to right are 2.4Ghz →Wired→BT) and then insert USB cable into your computer, the keyboard backlight lights on and turns to the default of RGB backlight effect. It means connection successful.

Bluetooth® Pairing Instructions:
Perform the following steps to pair this keyboard with your device(s).
1. This Bluetooth keyboard can be paired with up to three devices at the same time. Please toggle the mode switch to the Bluetooth mode. (From left to right are 2.4Ghz →Wired →BT). Q key or W key or E key will flash .
2. Long press FN + Q or FN+W or FN+E for 3-5 seconds to enter pairing mode. At this time, the Q/W/E key will flash blue quickly indicates that keyboard is ready to connect.
3. Open the Bluetooth settings on your device and scan for available devices. Locate and select the device name entry. "CIDOO V75-1" for FN+Q ; "CIDOO V75-2" for FN+W ; "CIDOO V75-3" for FN+E .
4. Once the keyboard has connected to your device, the Q/W/E key will cease flashing, and light on after Bluetooth pairing was successful. Short press "FN" and "Q" or "FN" and "W" or "FN" and "E" keys to switch paired Bluetooth device.
The Bluetooth connection has memory .It will disconnect when power off the keyboard, and the keyboard will re-connect to the last device when power on the keyboard again.

2.4G mode Usage method:
1.Please toggle the mode switch to 2.4Ghz mode . From left to right are 2.4Ghz →Wired→ BT. "R" key will flashes green .

2.Plug the receiver into USB port of the device .The "R" key will cease flashing and the keyboard backlight turns to the default of RGB backlight effect. It means connection successful.

2.4Ghz pairing instruction
The keyboard 2.4Ghz mode is default paired . If you need to re-pair 2.4Ghz mode , Please perform the following operations :
Long press FN+R key enter 2.4g pairing mode . At this time, "R" key flashes green color quickly .Insert 2.4G dongle to USB port . After the connection is successful, "R" key stops blinking and goes to steady color and turns to the default of RGB backlight effect, it means connection successful.

Auto sleep mode
In Bluetooth and 2.4G mode, after 5 minutes without key press ,the backlight will turn off to conserve the battery , any key press will be awoken the keyboard.
In Bluetooth mode, the deep sleep mode will be entered after 30 minutes without key press, and the Bluetooth is disconnected. Press any key to exit the deep sleep mode, and the RGB back light will turn up and connect back to Bluetooth.

Battery Charging Indicator:
When the battery power of the keyboard is low (the battery power is less than 3.5V), the FN key will keep flashing red. When charging, the FN key will be steady red light. After fully charged ,the FN key will turn off red light and back to current RGB backlight .

Custom Configuration
CIDOO V75 supports using the VIA program to change key layout.
Note : Make sure your keyboard is properly plugged into your computer . VIA installation steps are as follows:

1.Please visit <https://github.com/WestBerryVIA/via-releases/releases> to download the latest VIA application for your computer's OS here. As following photo shows:

2.Download CIDOO V75-2.4g .JSON or CIDOO V75-USB .json file from CIDOO official website (WWW.CIDOO.COM) and upload it to VIA software . Open VIA software, select File, then Import Keymap, then select the corresponding JSON file. USB .JSON file should be used in wired mode, 2.4G .JSON should be used in 2.4G mode. As shown below:

3.The VIA software is installed and connected successfully if it is show as below photo.

If VIA software does not recognize your keyboard, please contact our customer service staff for assistance
VIA will automatically detect your keyboard compatibility if it's plugged in. Keyboard memory is persistent, which means that wherever you plug in keyboard, it remembers the settings.
On the top half of VIA software, choose one key which you want to change by your mouse, and then select the key on the bottom half of VIA software, and it was effected.

See below for more information about configuration Macros setting

Macro Settings
CIDOO V75 does not have physical multimedia keys, you can remap the keys through the VIA software to achieve the function.
CIDOO V75 is configured with 4 layers from 0 to 3 by default, and each individual key can have multiple functions.

This is important for smaller keyboards, where there aren't enough physical keys to do all the functionality you need.

Special keys setting
Here you can remap the key to replace the special key to the key you want, to achieve the quick operation of the function.

QMK LED light
CIDOO V75 VIA software provides many different RGB lighting effects by default. You can change the lighting brightness, speed, color and customize the lighting effect you want. You can also change the key to operate the lighting effect you set.

Others custom
CIDOO V75 Layers allow you to configure your keyboard with more behaviors than its number of physical keys .
CIDOO V75 default customized 0-3 layer keyboard layout.
Layer0: This layer will be activated when your keyboard connected to the Windows system.
Layer0: This layer will be activated when your keyboard connected to the Mac system.
Left Alt=Left Option Left Win=Left Command Right Alt= Right Option

Layer1: This layer will be activated when your keyboard's system toggle switched to Windows or Mac system and long press Fn1(3) key.

Layer2: This layer will be activated when your keyboard's system toggle switched to Windows or Mac and key mapped any key to MO(2), save and then long press it.

Layer3: This layer will be activated when your keyboard's system toggle switched to Windows or Mac , key mapped any key to MO(3), save and then long press it.

Keys Descriptions:

Key	Function
Hue+	Hue Increase
Sat+	Light Saturation+
RGB Md+	RGB Mode Next
RGB Tog...	Turn On/Off Backlight
Win...	Switch to Windows mode
Mac...	Switch to Mac Mode
Hue-	Hue Decrease
Sat-	Light Saturation
BT 1	Bluetooth Device 1
BT 2	Bluetooth Device 2
BT 3	Bluetooth Device 3
Bright+	Backlight Brightness Increase
Lock Win	Lock Windows Key
USB Mode	Switch To USB Mode
RGB SPD	RGB Speed Increase
Bright-	Backlight Decrease
RGB SPI	RGB Speed Increase
Fn1(3)	Layer 1 will be activated when long press Fn1(3)
MO(2)	Layer 2 will be activated when long press MO(2)
MO(3)	Layer 3 will be activated when long press MO(3)

保修声明

感谢您对我司产品的信任与支持，为了您放心使用本产品，更好地保障您的权益，我司严格遵守并执行相关规定，实行售后相关服务：
服务内容：按微软计算机硬件故障维修更换责任规定进行服务
以下不属于服务之范围：
(A) 误用、滥用或不适当的运输;
(B) 维护或故障，例如但不限于在不适当的速度、湿度或其他不当环境下使用;不可拆卸或外部零件、网络电力中断等非我们可合理控制的事项;
(C) 非授权人员直接修改或更改;
(D) 任何第三方产品或服务;
(E) 将产品用于非指定或预期目的。
(F) 以其他违反产品使用说明书的方式使用，产品在使用过程中发生的正常损耗或老化、划伤、擦伤以及使用涂料、溶剂或其他化学物质导致的损害不属于保修范围。如产品原有识别标签被更改或损毁，本产品将失效。产品及随附物的完好和齐全不属于保修范围。您在接收产品时应仔细检查并开任何不并提出异议。
以上是我们对产品作出的全部保证，且仅在中国大陆地区适用。本保证书不赋予您特定的法律权利，根据法律还可能享有其他权利。本文件的任何内容均不影响您根据法律规定的不能排除或限制的消费者权益。

产品保修信息

产品名称	保修范围	部件名称	保修期 (月)	保修券类型	备注
V75	主要部件	键盘	12	取送维修	

注释和说明：
1. 保修期从产品出厂日期起算。
2. 产品在保修期内发生质量问题，经我司售后人员检测确认后，我司将根据保修政策提供免费维修或更换服务。
3. 保修期内的产品维修，我司不承担任何运输费用。
4. 保修期内的产品维修，我司不承担任何人工费用。
5. 保修期内的产品维修，我司不承担任何材料费用。
6. 保修期内的产品维修，我司不承担任何配件费用。
7. 保修期内的产品维修，我司不承担任何工时费用。
8. 保修期内的产品维修，我司不承担任何其他费用。

