

Thank you very much for purchasing our AJAZZ AK692 three-mode mechanical keyboard (Bluetooth + Wired + 2.4G), with various cool functions and RGB lighting effects, I hope it can bring you a new operating experience. To get more custom settings and functions, please download and install the driver software from the official website: <http://www.a-jazz.com/>

### 1. Basic Parameters

Brand: AJAZZ

Model: AK692

Transmission Method: Bluetooth+2.4G+wired

Interface type: Type-C

Product Size: 291x 102x 39mm

Product Weight: 625g


Shell Material: upper cover iron plate, decorative plate ABS plastic, lower cover ABS plastic

Keycap Material: ABS two-color light transmission

Lighting effects: 18 RGB lighting effects and 17 monochrome lighting effects

Key Layout: Compact 68-key layout

Support System: Win8/ Win10/android/IOS/MAC and other operating systems, support multiple language versions

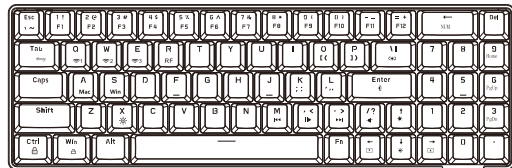

### 2.Function Switching (see the description of the button function diagram)

- FN+Spacebar for 3 seconds, the keyboard light flashes 3 times, restore factory settings

Fn key combination	Function
FN+ESC	~`
FN+1	F1
FN+2	F2
FN+3	F3
FN+4	F4
FN+5	F5
FN+6	F6
FN+7	F7
FN+8	F8
FN+9	F9
FN+0	F10
FN+~	F11
FN+=	F12
FN+O	{ }
FN+P	[ ]
SHIFT+O	SHIFT+[
SHIFT+P	SHIFT+]
FN+K	;
FN+L	,
SHIFT+K	SHIFT+;
SHIFT+L	SHIFT+,'
FN+A	MAC
FN+S	WIN
FN+M	Previous
FN+,	Play / Pause
FN+.	Next
FN+/,	Mute
FN+bak←	On/Off right digital function

### 3. Status Indicator Description

- The keyboard is normally connected to the device, the upper and lower case indicator lights are indicated on the CAPS button, the indicator light is white when the upper case function is turned on, and the indicator light returns to normal mode when the upper case function is turned off.
- Lock WIN Key Indicator: FN+WIN lock/unlock WIN, the indicator is on the WIN key, the function open indicator lights up in white, the function off indicator returns to normal mode
- FN Key Indicator: The low-voltage FN key keeps flashing, the FN key is always on when charging, and goes out when fully charged, following the system light effect

### 4. Sleep Mechanism and Bluetooth Name Description

- Deep Sleep: Deep standby after 30 minutes of no key operation on the keyboard, Bluetooth disconnects and sleeps, press any key to wake up the keyboard backlight and connect back to Bluetooth;
- Power Saving sleep: the backlight will be turned off after 5 minutes of no key operation on the keyboard, press any key to wake up the keyboard backlight and connect back to Bluetooth;
- Bluetooth name: AK692 BT3.0/AK692 BT5.0

### 5. Keyboard Connection

#### ① Mode switching and wireless connection mode

- Press FN+Q/W/E to select the device location, the Q/W/E key indicator light flashes slowly, press FN+QWE for 3s to enter the pairing mode, the indicator light flashes quickly, the pairing is successful Return to normal lighting mode, short press FN+Q /W/E to reconnect to the connected device, the Q/W/E indicator light flashes once after reconnection is successful and then goes out
- Press FN+R to enter 2.4G mode, the R indicator light flashes slowly, press FN+R for 3s to enter 2.4G pairing, the R key light flashes, the pairing is successful, the R key light returns to normal (the factory has already paired 2.4G, the keyboard wireless mode directly Press FN+R to enter the 2.4G back connection to use)

- Note: FN + TAB key, the TAB indicator flashes slowly, and the USB is successfully exited and flashes

#### ② Two-Stage Power Saving in Wireless Mode

- If the keyboard is not used for 1 minute, the keyboard light will turn off and enter the first-order power saving mode
- After 30 minutes of not using the keyboard, the keyboard enters sleep mode

### 6. Restore Factory Settings

- FN+Spacebar for 3 seconds, the keyboard light flashes 3 times, restore factory settings

### 7. Lighting Effect Control:

#### ① See the button function description diagram

- FN+| |: Lighting effect switching, 18 RGB lighting effects are cycled in turn/17 single light effects are cycled in turn

#### ② Light brightness adjustment

- FN+ ↑ : increase and adjust the brightness of the light, adjust the 5-level adjustment (including the current mode) to the maximum, the Caps button indicator and the WIN button indicator flashing prompt
- FN+ ↓ : Light brightness reduction adjustment 5-level adjustment (including the current mode), adjust to the minimum, the Caps button indicator and the WIN button indicator flashing prompt

#### ③ Light speed adjustment

- FN+← : 5-level adjustment (including the current mode) to slow down the light speed, adjust to the minimum, the Caps button indicator and the WIN button indicator flashing prompt
- FN+→ : Lighting speed is accelerated, 5-level adjustment (including the current mode), adjust to the minimum, the Caps button indicator and the WIN button indicator flashing prompt

#### ④ FN+X to turn off/on the keyboard light In Bluetooth mode, the light is turned off by default, press FN+X to turn on the light

#### ⑤ FN+win locks the WIN key

- ⑥ FN+The composite key with black font on the left CTRL function map will come out by pressing the key alone, the left Ctrl key light will light up in white, then press the FN+ left CTRL key to return to normal state, and the left Ctrl key light will return to normal

执行标准号： 国标GB/T 26245-2010  
键盘GB/T 14081-2010  
耳机GB/T 14471-2013



AJAZZ黑爵外设

AJAZZ® 黑爵

★ 本凭证为黑爵产品售后服务的重要依据，请您妥善保管。  
★ 任何产品问题，可扫码咨询微信公众号小爵

### 产品质保 ( Product Warranty )

感谢您对黑爵产品的信任与支持，为了让您放心使用本产品，更好地保障您的权益，我公司将严格遵守并执行相关规定，实行售后服务。

1. 服务有效期：自购买之日起质量保证12个月
2. 服务内容：按微型计算机商品维修更换退货责任规定进行服务
3. 不属于服务之范围：
  - a.已经超出有效服务或免费维修期的；
  - b.未按照正确使用说明使用、维护、保管导致故障或损坏的；
  - c.非本司授权维修机构维修导致的故障或损坏；
  - d.质保卡上无经销商资料及盖章之产品；
  - e.擅自涂改三包凭证内容的；
  - f.由于不可抗力(如自然灾害等)原因造成产品之不良；
  - g.人为因素导致产品不良(如操作失误、碰撞、输入不合适电压等)；
  - h.其他非产品设计、技术、制造、质量等问题导致的故障或损坏。

### 质保卡 ( Warranty Card )

产品型号：\_\_\_\_\_

购买日期：\_\_\_\_\_

客户姓名：\_\_\_\_\_

联系电话：\_\_\_\_\_

联系地址：\_\_\_\_\_

制造商：深圳市黑爵同创电子科技有限公司

地址：深圳市光明新区公明街道马田北路102号A栋2楼

电话：86-755-2740 7340

执行标准号：GB/T 14081-2010