

AJAZZ® × NACODEX^x


AK966蓝牙三模机械键盘
Bluetooth three-modes mechanical keyboard

使用说明书
User Manual

Thank you very much for purchasing our AJAZZ AK966. This product has various cool functions and lighting effects. I hope it can bring you a new operating experience.

1. Product Specifications

Brand: AJAZZ
Model: AK966
Transmission method: wired USB+wireless 2.4G+wireless bluetooth
Interface type: key line separated Type-C interface
Product size: 387.5x136.8x41.5mm
Product weight: 1027g
Shell material: ABS
Keycap material: PBT sublimation
Wire length: 1.8M
Lighting effects: RGB, 18 kinds of lighting effects
Key layout: 96 keys + knob layout
Support system: WindowsXP/Vista/Windows7/8/10/11

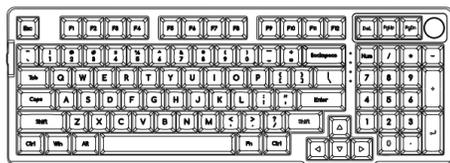

AJAZZ official website: <http://www.a-jazz.com/en/>

2. Description of Switch Indicator Light

Power Switch:
Three-gear toggle switch: 2.4G/USB/BT mode, default USB mode. (Location: Top left side)
Indicator Light Description:
1. Indicator light indication: NUM / CAPS / 2.4G / BT, light white;
2. FN indicates the power level, the charging red light FN is always on red, and the LED is off when fully charged; (connect the USB cable in any wireless mode to charge the device)
3. When the power of the keyboard is low, the FN key backlight flashes red continuously, indicating that it needs to be charged.
Deep Sleep Mode:
After 30 minutes of no key operation on the keyboard, deep standby, Bluetooth disconnection and sleep, press any key to wake up the keyboard backlight and connect back to Bluetooth.
Power Saving Sleep Mode:
The backlight will be turned off after 5 minutes of no key operation on the keyboard. Press any key to wake up the keyboard and connect back to Bluetooth.

3. Bluetooth Connection Instructions

FN+Q/W/E:
FN+Q/W/E Bluetooth channel switching, press once to switch channels, press and hold FN, the current channel indicator LED turns on white, release FN, the white light goes out, press. FN+Q/W/E for 3s to enter pairing, the BT indicator flashes quickly. When disconnecting the bluetooth and connecting to the BT, the indicator light flashes slowly and enters the connection back state.
FN+Space:
Press and hold for 3 seconds, the keyboard backlight will flash 3 times of white light, restore the factory settings.
Bluetooth name: AK966 BT5.0

4. Operating Instructions for Lighting Mode

FN+| \ / 2 @ / 3 # = Three groups of game lighting effects can be customized (all white lights are preset);
FN+! = Default FPS Mode — W/A/S/D / ↑ / ↓ / ← / →;

FN+2 @ = default LOL mode—Q/W/E/R/D/G/F/B/V/L-Ctrl/L-Alt/Tab/Space/1-6/Esc;
FN+3 # = Default 37-key office mode: A-Z 26 English letters / [] / { } / \ / | / ~ / ↑ / ↓ / ← / →;
FN+ - = Record/save lighting mode for the above three game mode lighting effects, press one button for one color during recording, a total of 8 colors;
FN+ ↑ = light brightness + (five gears) adjusted to the highest backlight indicator flashes 3 times to indicate;
FN+ ↓ = light brightness - (five gears) to the lowest backlight indicator flashes 3 times to indicate;
FN+ ← = dynamic light direction switch;
FN+ → = switch backlight color;
FN+ _ . - = light speed - (five gears) to the lowest backlight indicator flashes 3 times to indicate;
FN+ * + = light speed + (five gears) to the highest backlight indicator flashes 3 times.

5. Key Combination Function Descriptio

FN+F1 = Media Player	FN+F2 = Volume-	FN+F3 = Volume +
FN+F4 = Mute	FN+F5 = Stop	FN+F6 = Previous track
FN+F7 = Play/Pause	FN+F8 = Next track	FN+F9 = Mail
FN+F10 = Browser	FN+F11 = My Computer	FN+F12 = Calculator

FN+S = WINDOWS system usage mode (factory mode)
FN+A = MAC system usage mode
FN+X = turn off the all backlight (including the charging indicator)



关注微信公众号



关注抖音号

AJAZZ® 崇爵

★ 本凭证为崇爵产品售后服务的重要依据，请您妥善保管。
★ 任何产品问题，可扫码咨询微信公众号小编

产品质保 (Product Warranty)

感谢您对崇爵产品的信任与支持，为了让您放心使用本产品，更好地保障您的权益，我公司将严格遵守并执行相关规定，实行售后服务。
1. 服务有效期：自购买之日起质量保证12个月
2. 服务内容：按微型计算机商品维修更换退货责任规定进行服务
3. 不属于服务之范围：
a. 已经超出有效服务或免费维修期的；
b. 未按照正确使用说明使用、维护，保管导致故障或损坏的；
c. 非本司授权维修机构维修导致的故障或损坏；
d. 质保卡上无经销商资料及盖章之产品；
e. 擅自涂改三包凭证内容的；
f. 由于不可抗力(如自然灾害等)原因造成产品之不良；
g. 人为因素导致产品不良(如操作失误、碰撞、输入不合适电压等)；
h. 其他非产品设计、技术、制造、质量等问题导致的故障或损坏。

质保卡 (Warranty Card)

产品型号: _____
购买日期: _____
客户姓名: _____
联系电话: _____
联系地址: _____

制造商: 深圳市崇爵同创电子科技有限公司
地址: 深圳市光明新区公明街道马田北路102号A栋2楼
电话: 86-755-2740 7340
执行标准号: GB/T 14081-2010