


68Keys V2 series RGB USB Wired / USB+Bluetooth 2 mode

SKYLONG

Wired item:GK68/SK68/AK68

U+B 2mode item:GK68S/SK68S/AK68S

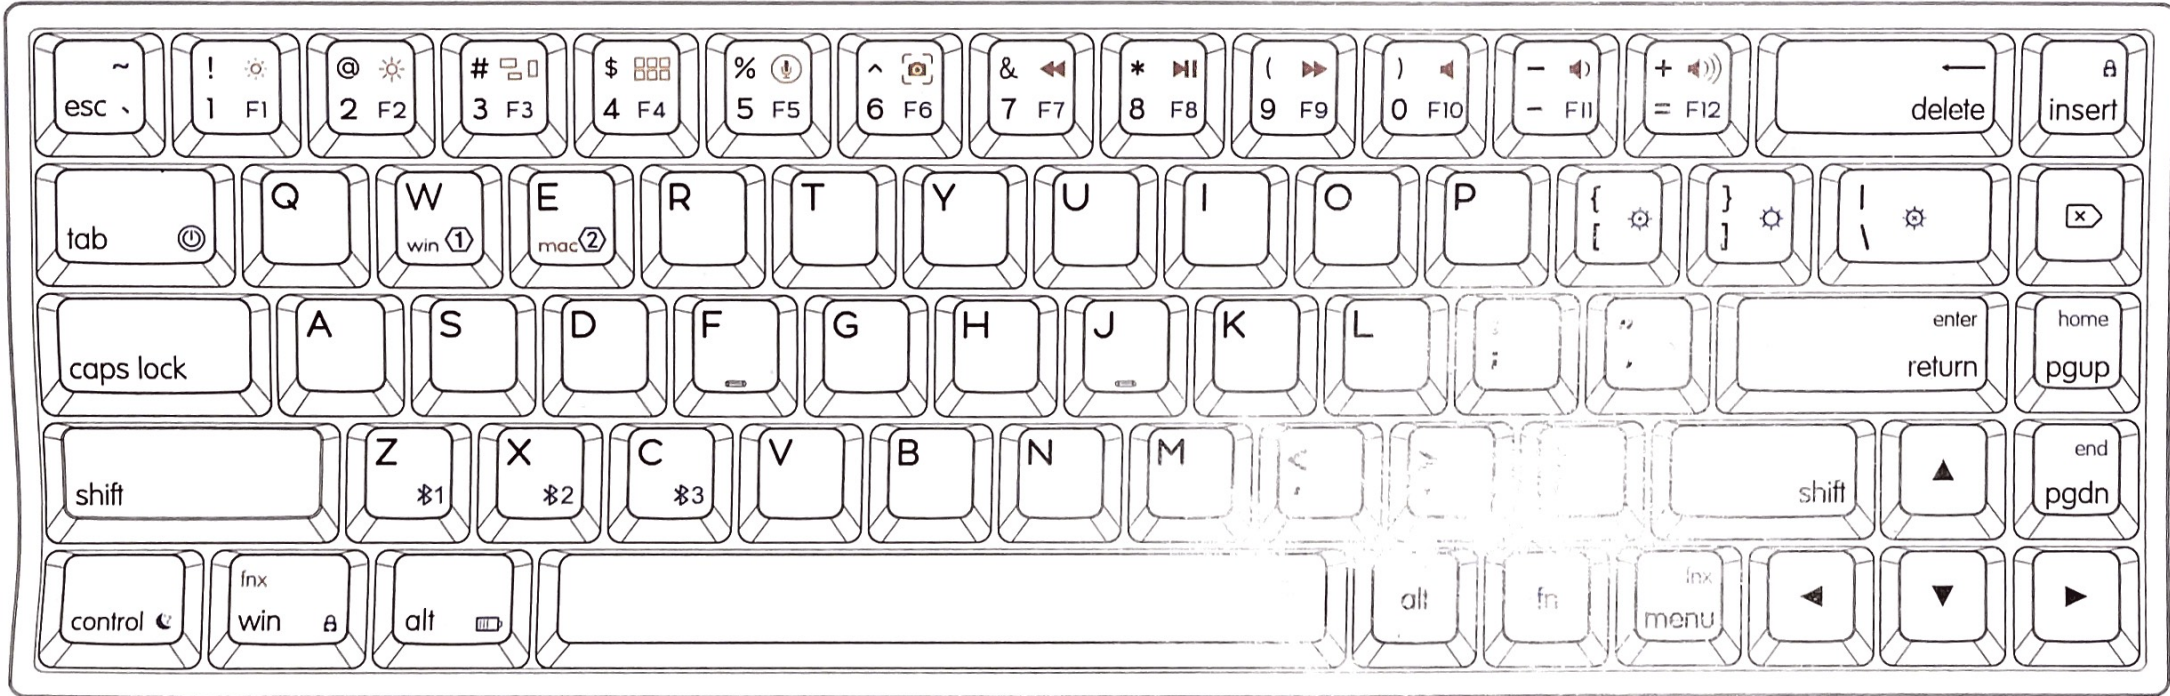

fn tips: Unlock/Lock the WIN key, prevent windows start pop-ups in the game.



fn tips: fn+space ON/OFF the BT mode, link to USB mode.

Bluetooth condition: Z, X, C one of blue led is flashing, the keyboard is connecting the BT equipment.

fn tips: If you are not sure which mode the keyboard is in now, press fn key and observe what LED is on to confirm

fn/Inx tips:

The default fn function is not so good? Set your own fnx Function

For example, in the win mode: fn + 7 = F7, fnx + 7 =
fn + 8 = F8, fnx + 8 =
fn + 9 = F9, fnx + 9 =
.....

fn function description (Double-click FN to light FN's white LED, FN function is held, click FN again to escape from holding status).

Define mode

Key	Function
Standard mode	Standard mode, all buttons can not be user-defined. User can customize your own personality keyboard by the following 4 modes. On-board mode 1/2/3 is strongly recommended.(Note: In the custom mode, except FN key, other keys can be redefined key values, some of the FN + " x " function can be also modified, except the backlight, bluetooth and system control. The FN button can not be moved, but user can define your own FNX at any key in the custom mode.
FN + W Onboard mode1 WIN mode	① FN + W, onboard mode layer 1, " W " lights white LED, no need to run and connect the driver. The keyboard works in the custom key functions and user can modify the key functions and macro Settings by the driver and these Settings can be downloaded and saved to the keyboard. The reference setting: WIN mode setting to realize the habitual operation of win users
FN + E Onboard mode2 MAC OS mode	② FN + E, onboard mode layer 2, " E " lights white LED. The reference Setting: keyboard of MAC OS, the "control,option,command" key will be in the original position, user can modify the Settings by the driver, download and save to the keyboard, no need to run and connect the driver when use the Mac's function settings. Press FN + 7& again, back to the standard mode.
Driver mode	Drive mode: Keyboard needs to be run and connected the driver in USB wired mode when realizes key function and light effects, some special function(for example: You may assign a macro of more than 32 bytes to a key in the driver mode while it's unavailable in those onboard mode layer) You must need keep the driver running and the keyboard connect with the driver.
FNX setting Onboard mode3	FNX setting: If you don't like the FN position and FN combination key function, you can set your own FNX position and FNX combination key function, some special function keys, or combination keys, or macro keys, these settings of this mode can be called by the FNX key in layer1& layer2, all settings in these mode can be modified and saved to the keyboard.

Backlight settings (Can not modify)

Key	Function
FN +	Light effect pause/play
FN +	Backlight ON/OFF
FN +	Backlight mode 1-5 (Can modify)
FN +	Backlight mode 6-9
FN +	Backlight brightness -
FN +	Backlight brightness +
FN +	Backlight Effect Speed -
FN +	Backlight Effect Speed +

Bluetooth settings (Only for bluetooth mode, can not modify)

Key	Function
FN + Space	Bluetooth ON/OFF switch Link to USB mode or the last BT equipment.
FN + Z	Long press: The red&green LED of Z keycap will flash, The bluetooth equipment can be paired. Press: The keyboard will connect the BT equipment or disconnect.
FN + X	Long press: The red&green LED of X keycap will flash, The bluetooth equipment can be paired. Press: The keyboard will connect the BT equipment or disconnect.
FN + C	Long press: The red&green LED of C keycap will flash, The bluetooth equipment can be paired. Press: The keyboard will connect the BT equipment or disconnect.

Note: If the Bluetooth pairing timed out or failed, please re-pair, if the bluetooth pairing is successful on the equipment, but the keyboard can not work still, Please delete this keyboard in the Bluetooth list, Turn off bluetooth of your PC or Mobile, restart the keyboard, and re-pair.

System Control (Cannot modify)

	Long press the label at the bottom of the Bluetooth dual-mode optical keyboard for 3 seconds to turn on/off keyboard, wired version doesn't have this function.
FN + Tab	Long press FN+Tab 3 seconds to on/off the Bluetooth dual-mode mechanical keyboard, wired version doesn't have this function.
FN + all	Turn off/on the charging indicator, low voltage alarm, the wired version does not have this function.
FN + control	Keyboard's sleep time setting, white LED on 0 never sleep, 1:5minutes, 2:10minutes9:45minutes to sleep.

Fn function (Reference Settings, can be modified by driver)

Key	Mac mode function	Win mode function
FN + 1	Screen brightness - for Mac	F1
FN + 2	Screen brightness + for Mac	F2
FN + 3	for Mac	F3
FN + 4	for Mac	F4
FN + 5	One click call Siri for Mac	F5
FN + 6	Screenshot for Mac	F6
FN + 7	Previous	F7
FN + 8	Play/Pause	F8
FN + 9	Next	F9
FN + 0	Mute	F10
FN + -	Volume -	F11
FN + =	Volume +	F12
FN +	delete	delete
FN + pgup	home	home
FN + pgdn	end	end
FN + win	Lock/Unlock Win key	
FN + Insert	Lock/Unlock fn key	
FN + Esc		FN+Shift+Esc

